



US00688404B2

(12) **United States Patent**
Dooley

(10) **Patent No.:** **US 6,884,040 B2**
(45) **Date of Patent:** **Apr. 26, 2005**

- (54) **MULTI PUMPING CHAMBER
MAGNETOSTRICTIVE PUMP**
- (75) Inventor: **Kevin Allan Dooley, Mississauga (CA)**
- (73) Assignee: **Pratt & Whitney Canada Corp.,
Longueuil (CA)**
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 23 days.

5,203,172 A	*	4/1993	Simpson et al.	60/545
5,215,446 A		6/1993	Takahashi et al.	417/322
5,338,164 A		8/1994	Sutton et al.	417/413 A
5,501,425 A		3/1996	Reinicke et al.	251/129.15
5,558,504 A		9/1996	Stridsberg	417/322
5,630,709 A		5/1997	Bar-Cohen	417/322
5,641,270 A		6/1997	Sgourakes et al.	417/44.2
5,720,415 A		2/1998	Morningstar	222/1
5,798,600 A		8/1998	Sager et al.	310/330
6,026,847 A		2/2000	Reinicke et al.	137/487.5
6,059,546 A	*	5/2000	Brenan et al.	417/534
6,074,179 A		6/2000	Jokela et al.	417/322
6,170,921 B1		1/2001	Naerheim	303/10

(21) Appl. No.: **10/034,054**

(22) Filed: **Dec. 27, 2001**

(65) **Prior Publication Data**

US 2003/0123999 A1 Jul. 3, 2003

(51) **Int. Cl.⁷** **F04B 17/00**

(52) **U.S. Cl.** **417/53; 417/410.1; 417/412;
417/534**

(58) **Field of Search** 417/322, 410.1,
417/474, 475, 412, 418, 534, 393, 512,
53, 413.2, 375

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,690,128 A	*	9/1954	Basilewsky	103/53
3,754,154 A	*	8/1973	Massie	310/30
4,365,942 A		12/1982	Schmidt	417/412
4,585,397 A		4/1986	Crawford et al.	417/63
4,726,741 A		2/1988	Cusack	417/322
4,795,317 A		1/1989	Cusack	417/322
4,804,314 A		2/1989	Cusack	417/322
4,845,450 A		7/1989	Porzio et al.	335/215
4,927,334 A	*	5/1990	Engdahl et al.	417/322
5,129,789 A	*	7/1992	Thornton et al.	417/53

FOREIGN PATENT DOCUMENTS

DE	40 32 555 A1	4/1992	
DE	19536491	4/1997	
JP	6-101631	* 4/1994	
JP	11-93830	* 4/1999	
JP	11182437 A	* 7/1999	F04B/43/04

* cited by examiner


Primary Examiner—Charles G. Freay

(74) *Attorney, Agent, or Firm*—Ogilvy Renault

(57) **ABSTRACT**

A positive displacement pump includes a magnetostrictive actuator. A single actuator drives multiple pumping chambers. The pump may include two pumping chambers driven in phase by the linear expansion of the actuator at both its ends. The pump may include a third pumping cavity, driven by the transverse expansion and contraction of the actuator, out of phase with either cavity driven by the lengthwise extension of the actuator. A pump assembly having multiple pumps each including a magnetostrictive element is also disclosed.

10 Claims, 13 Drawing Sheets

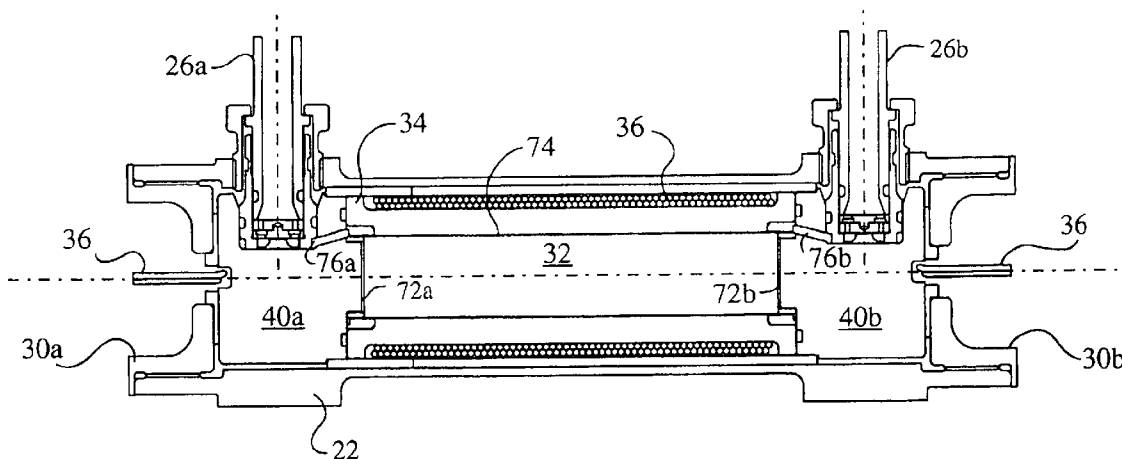

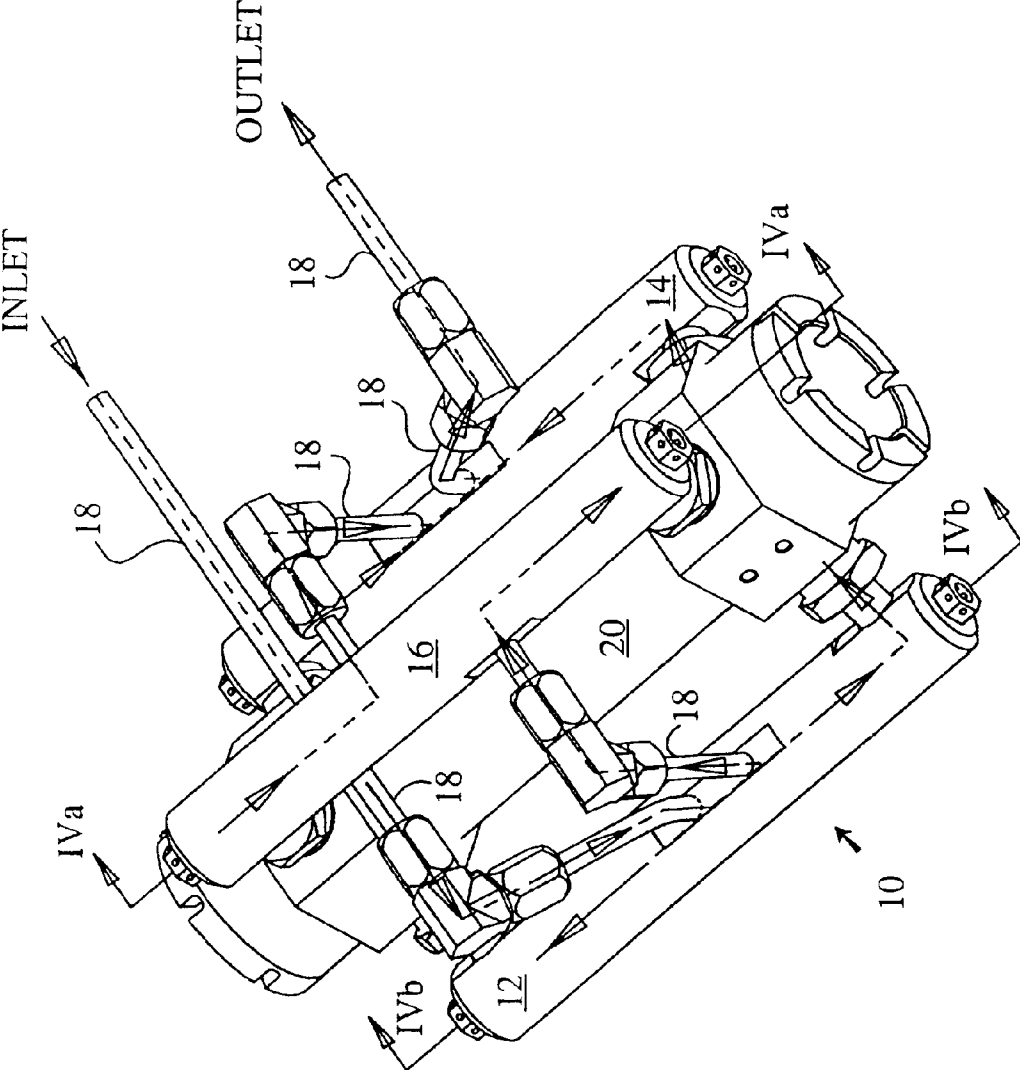


FIG. 1

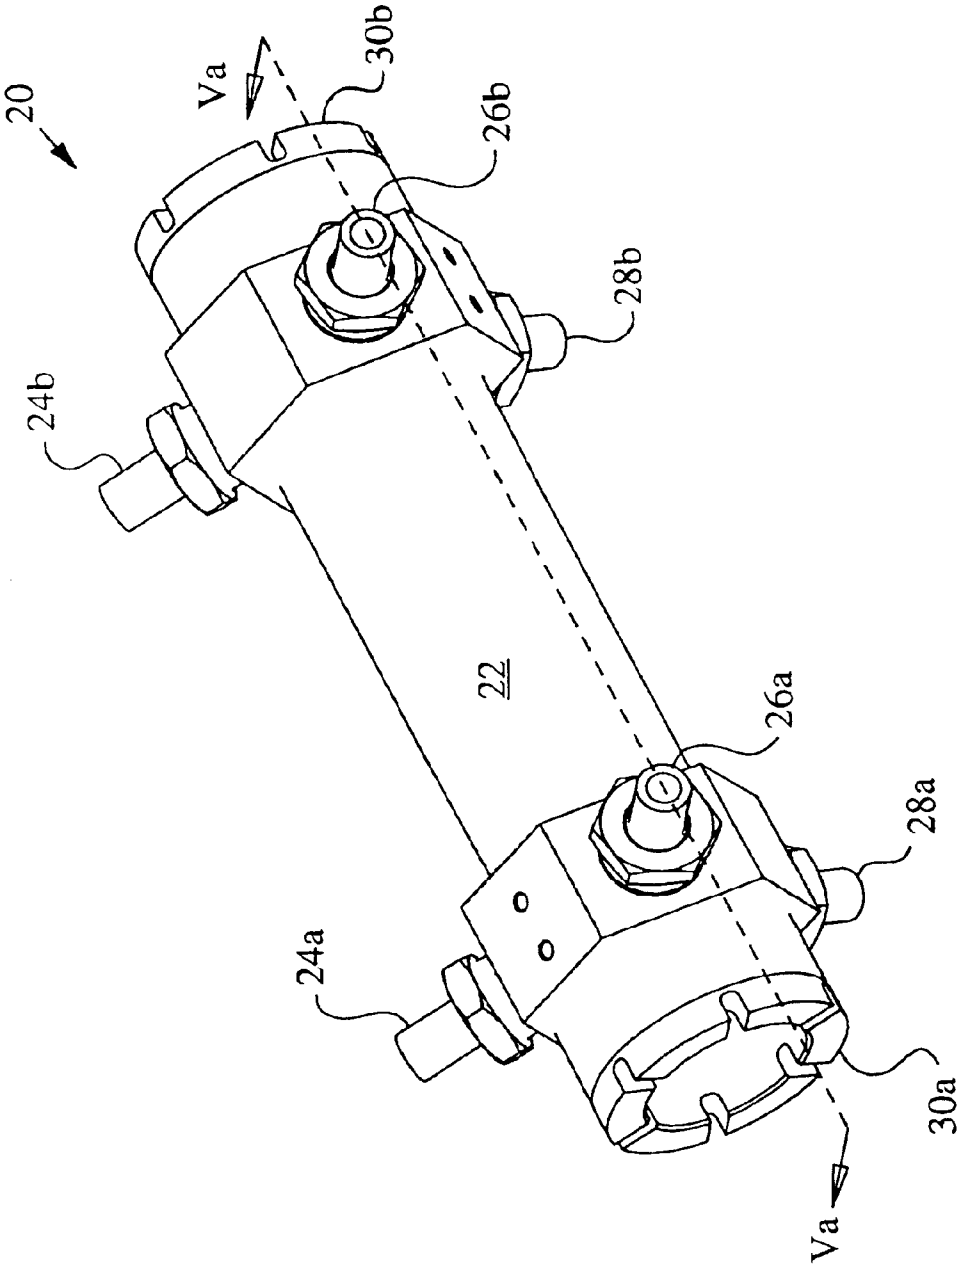


FIG. 2

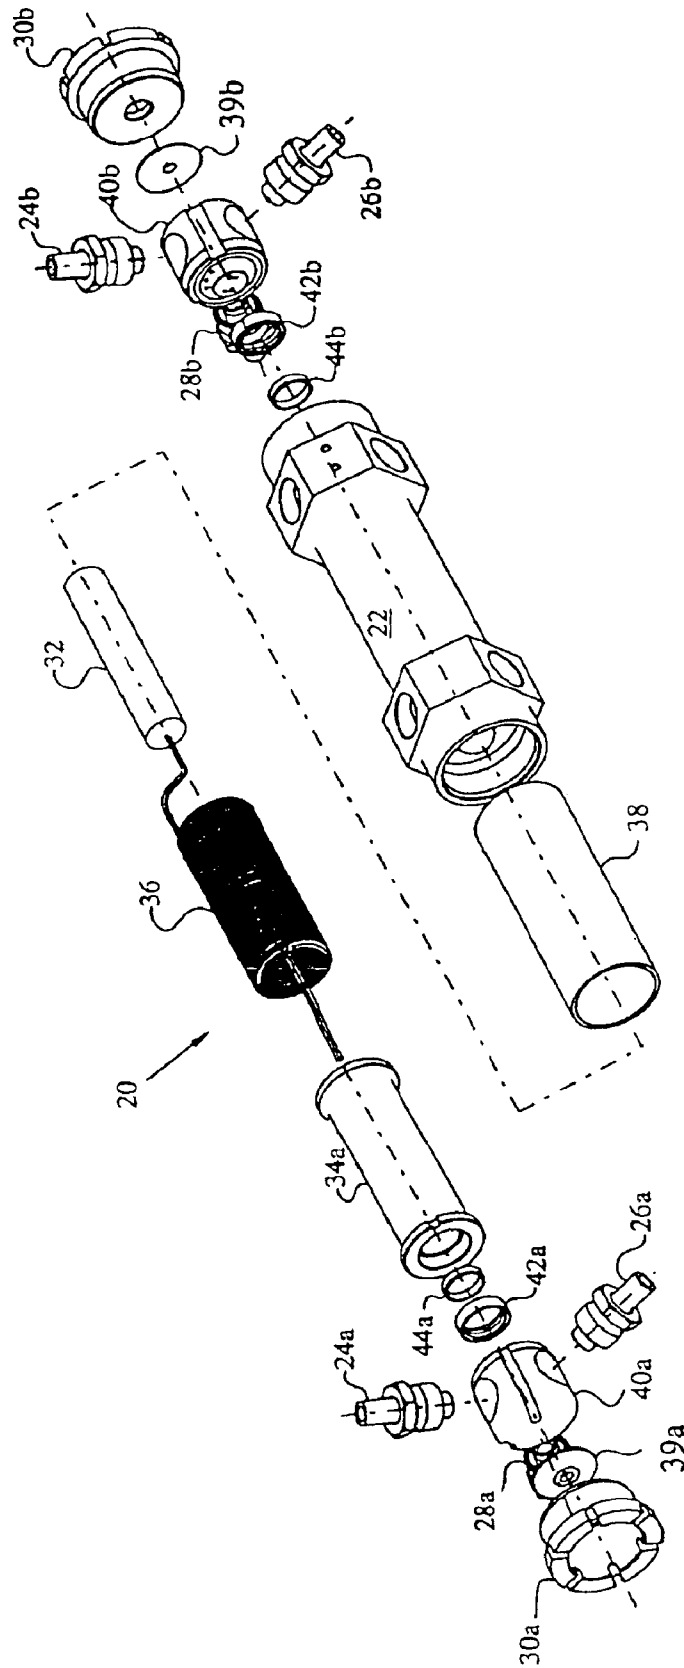


FIG. 3

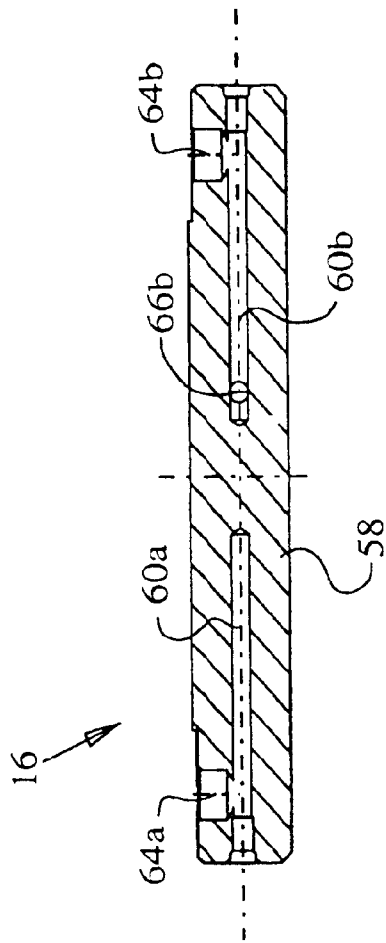


FIG. 4A

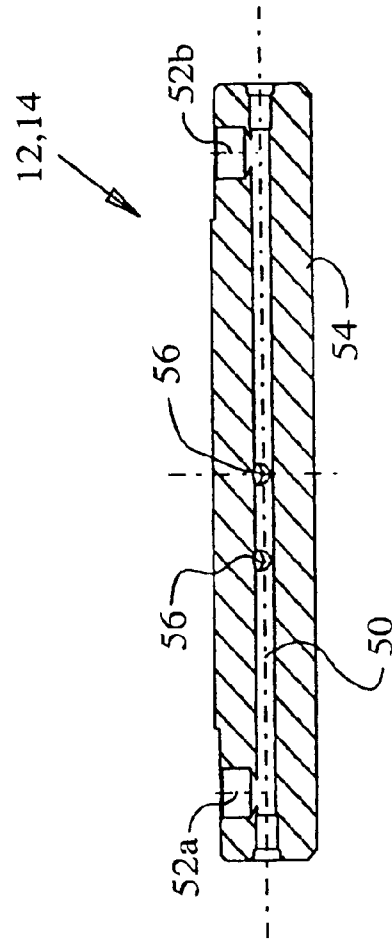


FIG. 4B

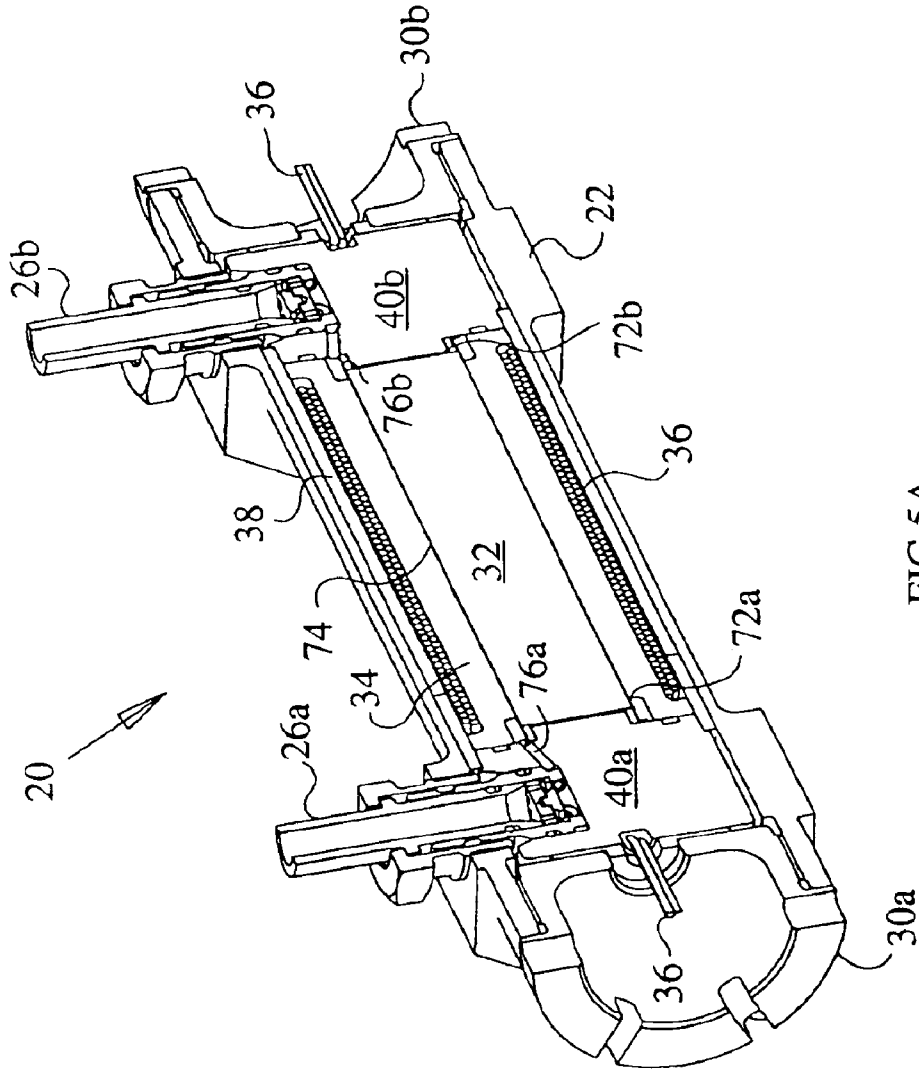


FIG. 5A

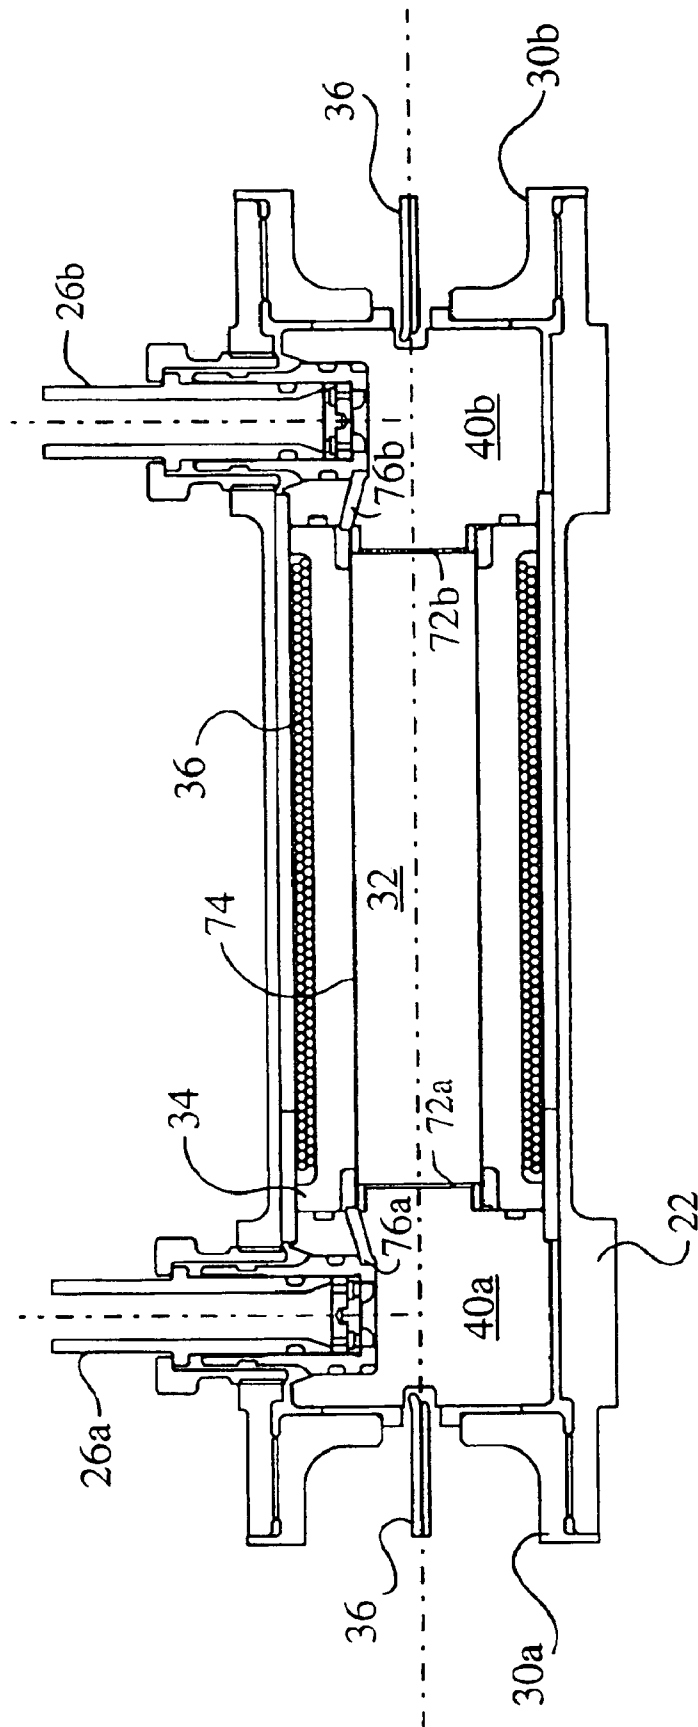


FIG. 5B

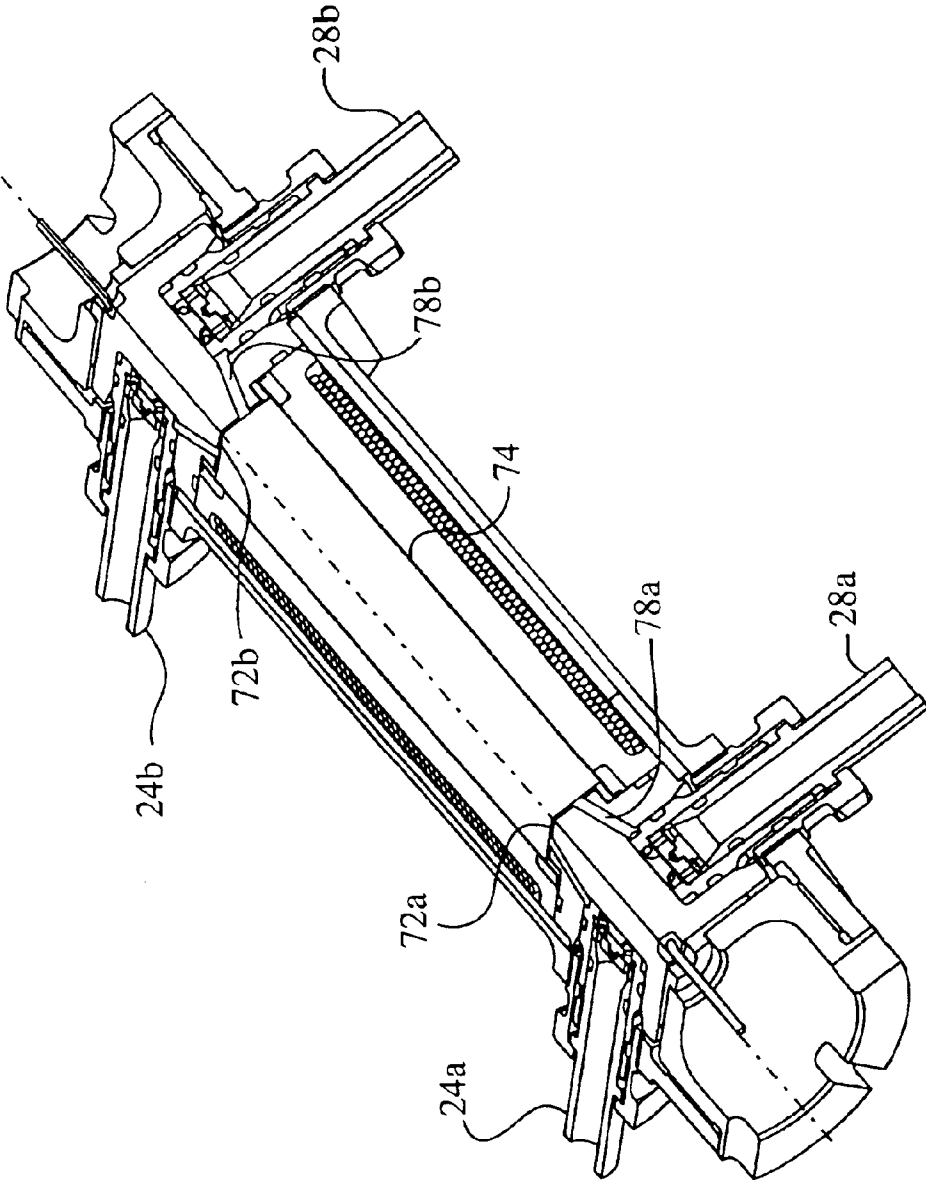


FIG.6A

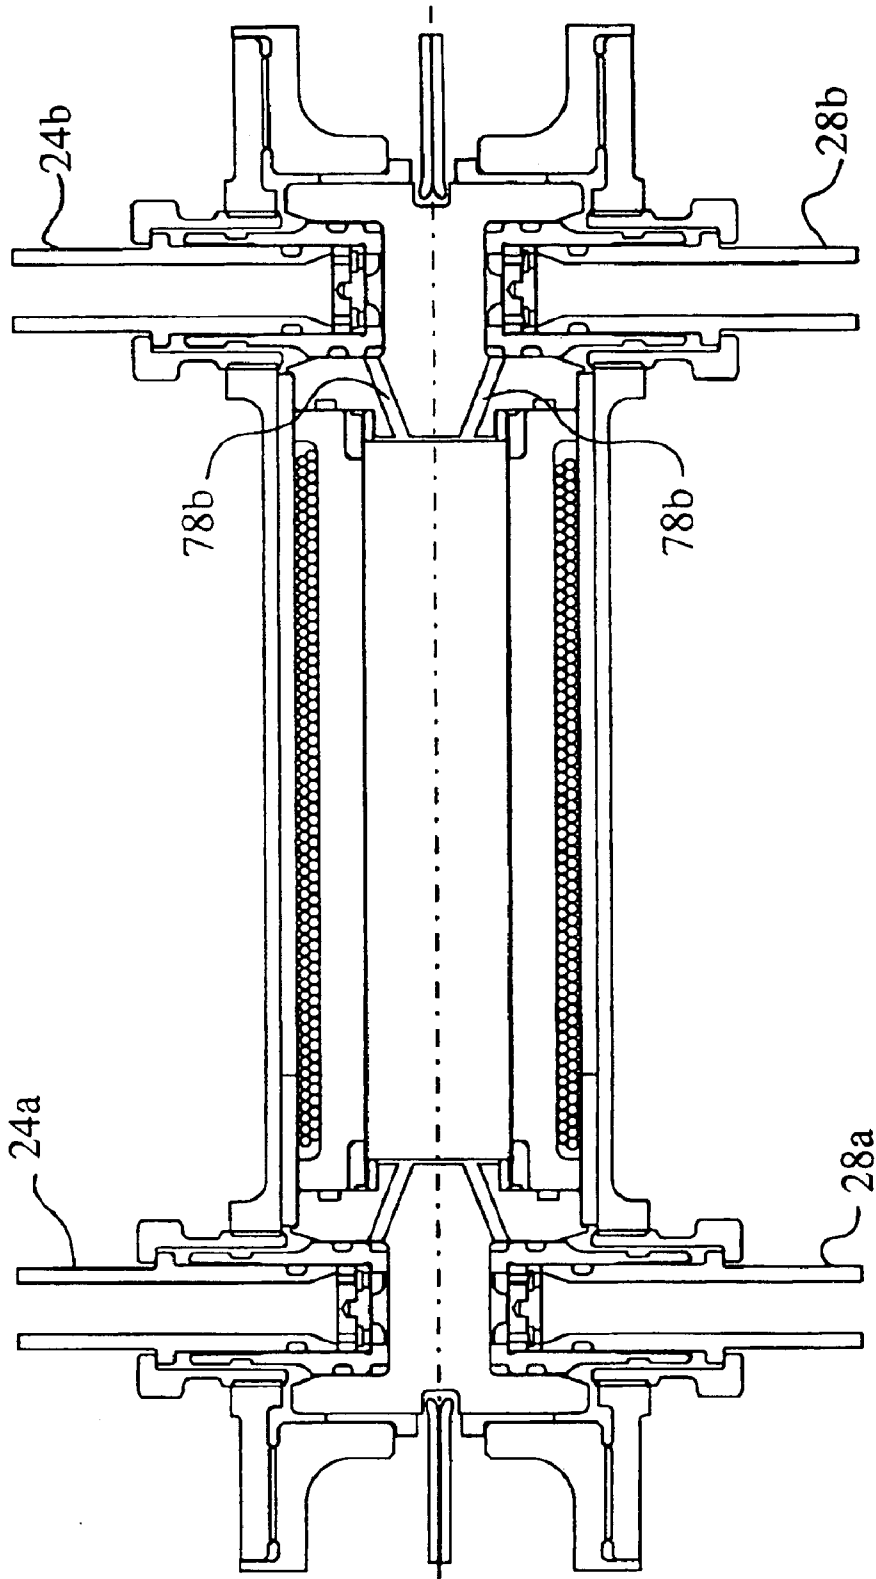


FIG. 6B

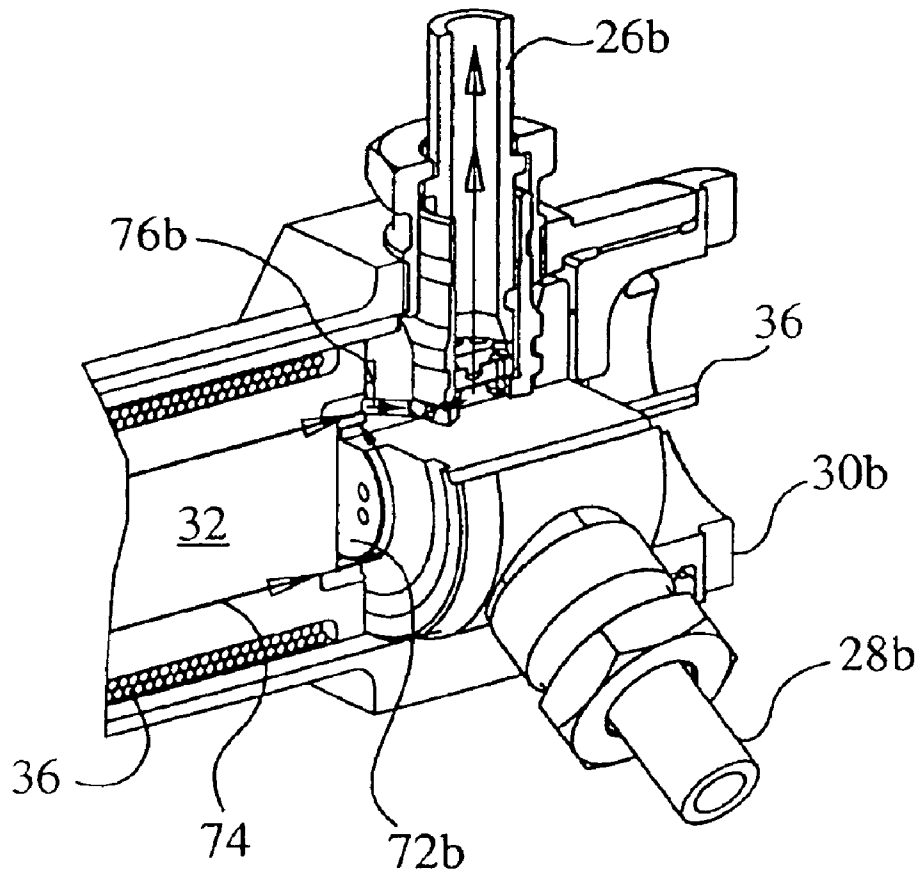


FIG.7A

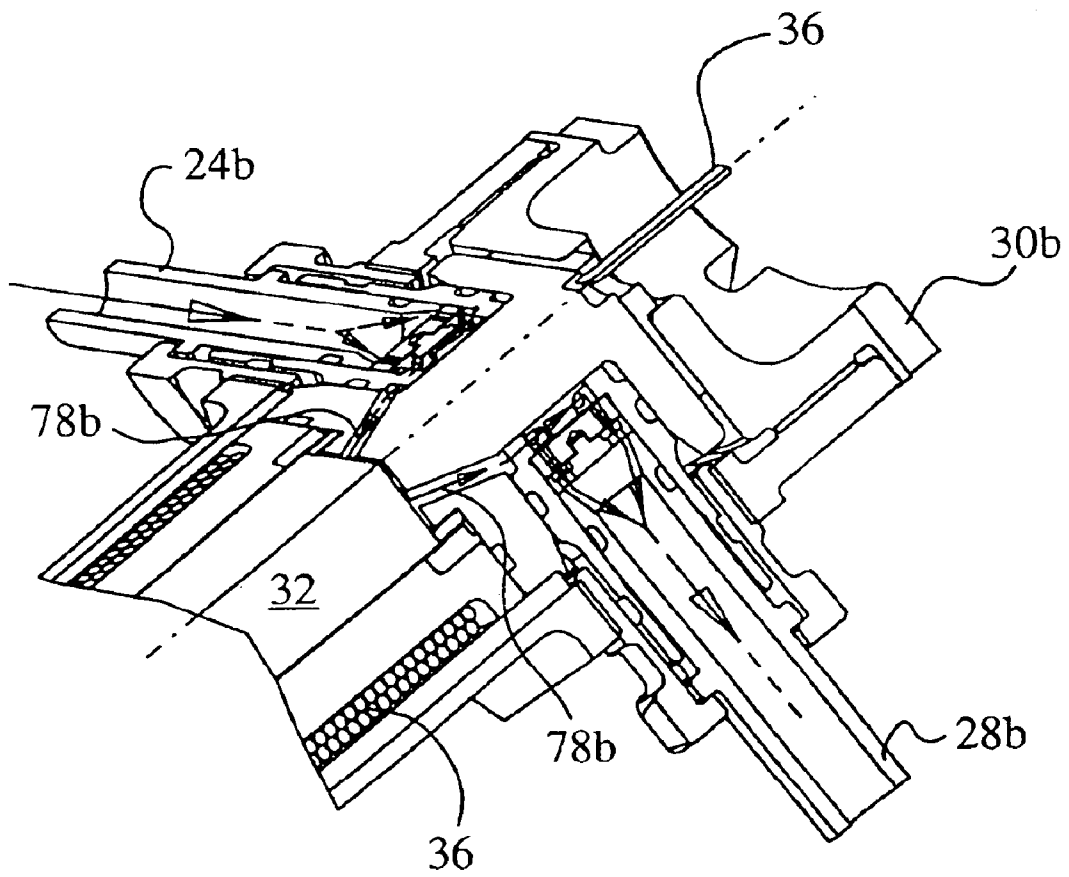


FIG.7B

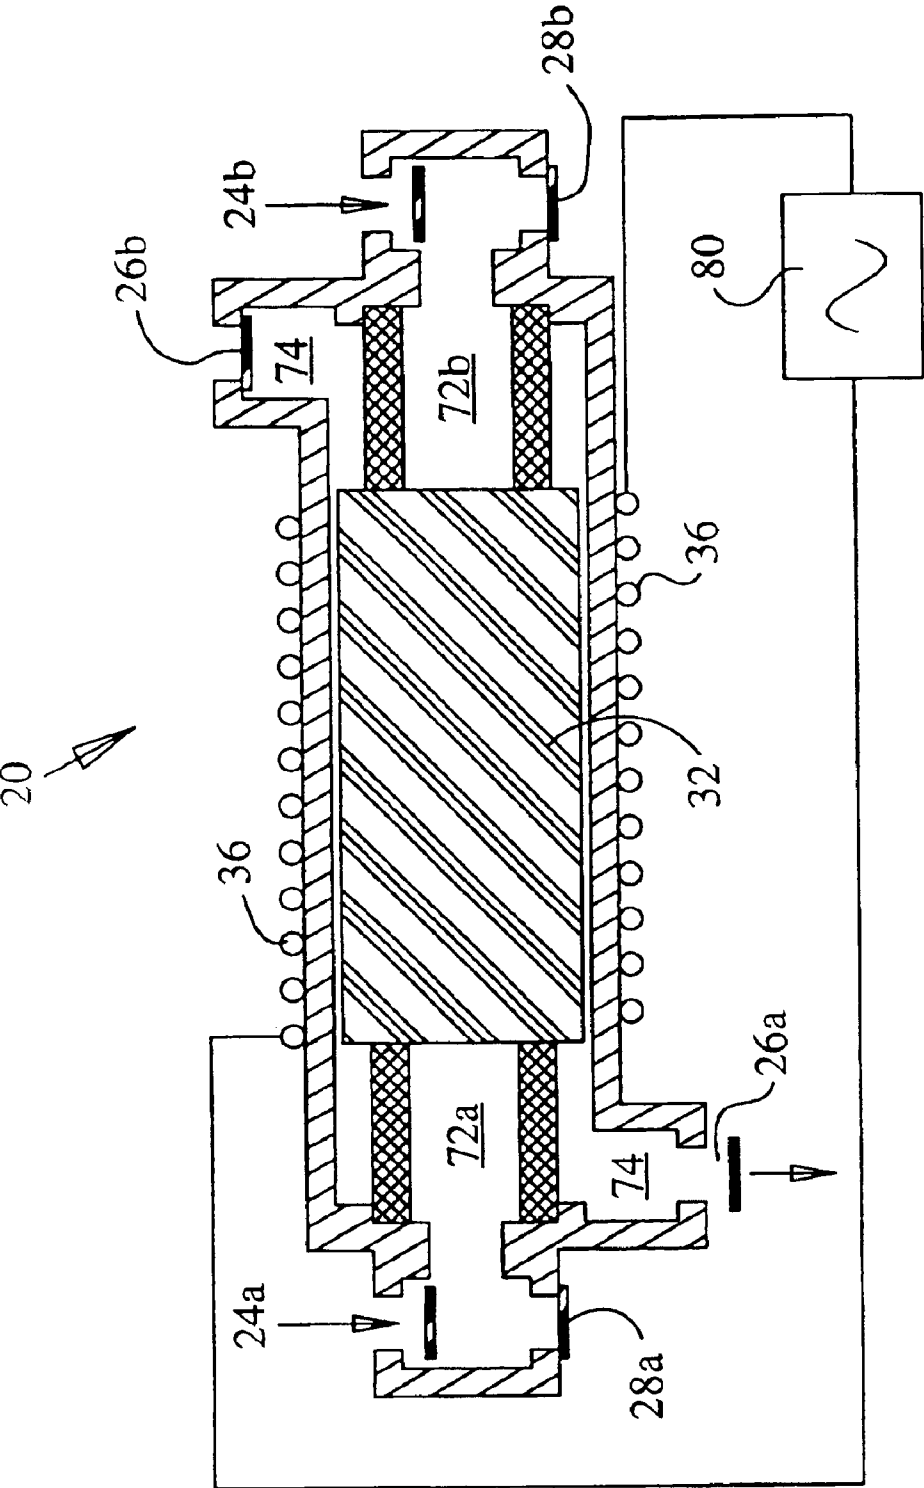


FIG.8

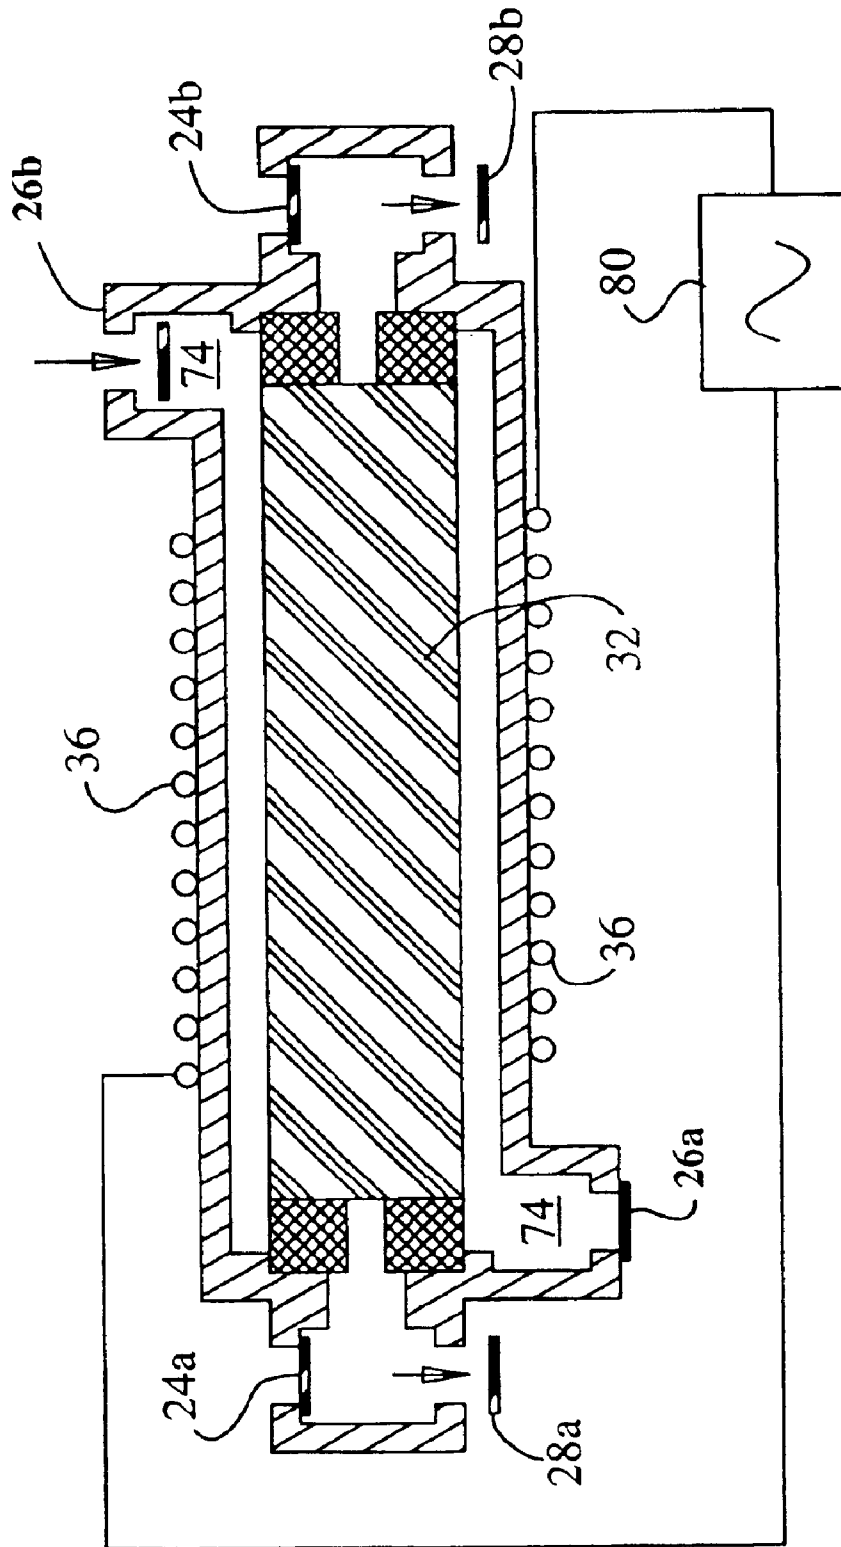


FIG.9

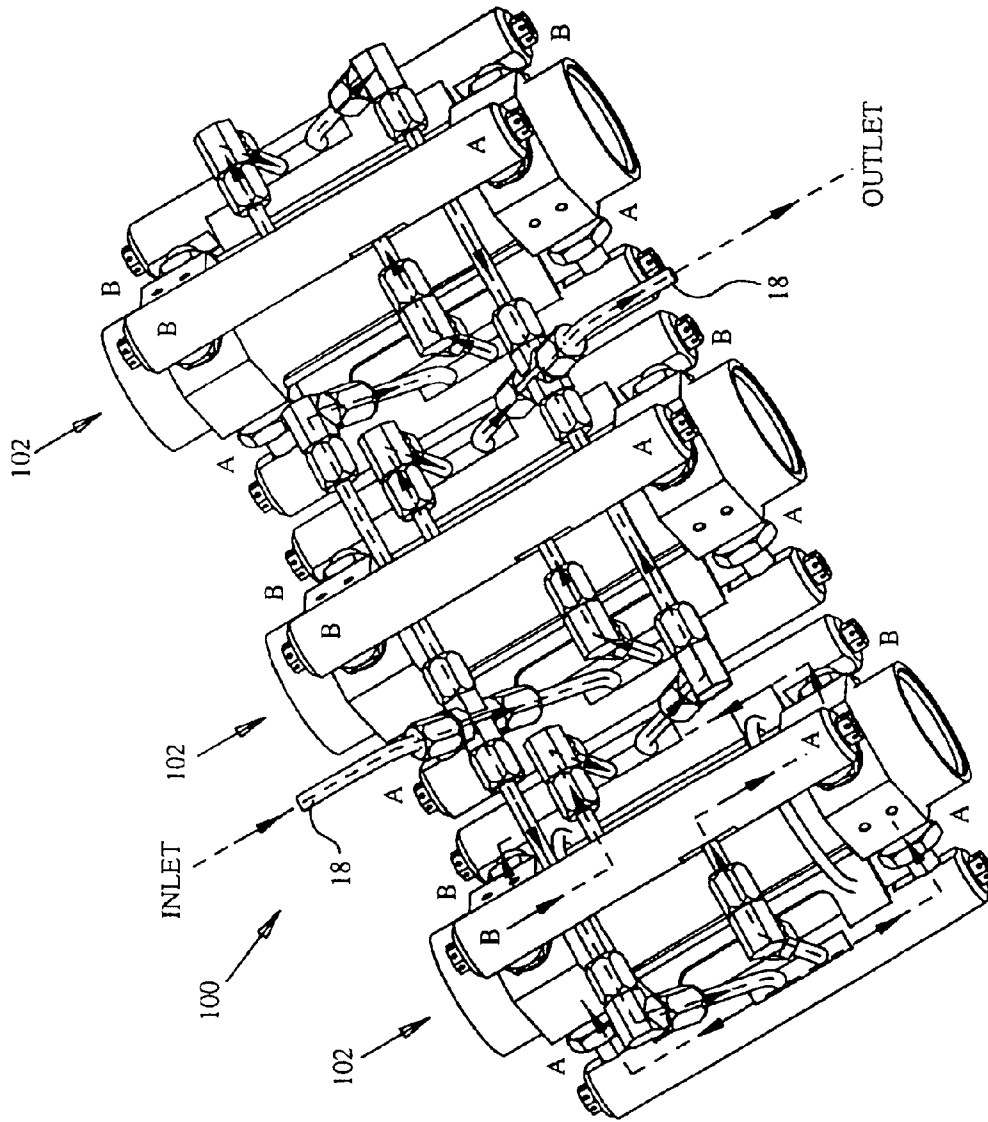


FIG.10

1

MULTI PUMPING CHAMBER MAGNETOSTRICTIVE PUMP

FIELD OF THE INVENTION

The present invention relates generally to pumps, and more particularly to pumps making use of magnetostrictive actuators.

BACKGROUND OF THE INVENTION

Conventional positive displacement pumps pump liquids in and out of a pumping chamber by changing the volume of the chamber. Many pumps are bulky with many moving parts, and are driven by a periodic mechanical source of power, such as a motor or engine. Often such pumps require mechanical linkages, including gearboxes, for interconnection to a suitable source of power.

Other types pumps, as for example disclosed in U.S. Pat. No. 5,641,270; and German Patent Publication No. DE 4032555A1 use an actuator made of a magnetostrictive material. As will be appreciated, magnetostrictive material change dimensions in the presence of a magnetic field. Numerous magnetostrictive materials are known. For example, European Patent Application No. 923009280 discloses many such materials. A commercially available magnetostrictive material is sold in association with the trademark Terfenol-D by Etrema Corporation, of Ames, Iowa.

These magnetostrictive pumps rely on the expansion and contraction of a magnetostrictive element to compress a pumping chamber. Known magnetostrictive pumps however compress a single pumping chamber. As such, these pumps produce a single pumping compression stroke for each cycle of contraction and expansion of the magnetostrictive material. This, in turn, may result in significant pressure fluctuations in the pumped fluid. The flow rate is similarly limited to the displacement of the single pumping chamber. Moreover, pumps with a single actuator may be mechanically imbalanced and thereby prone to mechanical noise and vibration as the single actuator expands and contracts.

In certain applications, constant pressures and high flow rates per unit weight of a pump are critical. For instance, in fuel delivery systems in aircrafts, pump designs strive to achieve low pump weight to fuel delivery ratios, while still providing for smooth fuel delivery.

Accordingly, an improved magnetostrictive pump facilitating high flow rates, and smooth fluid delivery would be desirable.

SUMMARY OF THE INVENTION

In accordance with the present invention, a pump includes a magnetostrictive element, and multiple pumping chambers all driven by this magnetostrictive element. The pumping chambers may pump fluid in or out of phase with each other.

Conveniently, a pump having multiple pumping chambers may provide for smoother fluid flow, less pump vibration, and increased flow rates.

In accordance with one aspect of the present invention, a pump includes an actuator formed of a magnetostrictive material susceptible to changes in physical dimensions in the presence of a magnetic field; and first and second pumping chambers coupled to the magnetostrictive element to vary in volume as the magnetostrictive element changes shape.

In accordance with another aspect of the present invention, a pump includes a housing defining a cylindrical

2

cavity; a cylindrical actuator formed of magnetostrictive material, within the housing and coaxial therewith; first and second pumping chambers within the housing at opposite ends of a lengthwise extent of the magnetostrictive element.

5 Each of the pumping chambers is mechanically coupled to the actuator, to compress as the actuator extends in length.

In accordance with yet a further aspect of the present invention, a method of pumping fluid using a magnetostrictive element includes, applying a magnetic field to a magnetostrictive element to cause lengthwise extension of the element at two opposing ends; driving a first pumping chamber through the extension of a first end of the two opposing ends; and driving a second pumping chamber through the extension of a second of the two opposing ends, opposite the first end. Thus, the first pumping chamber is driven in phase with the second pumping chamber.

Other aspects and features of the present invention will become apparent to those of ordinary skill in the art upon review of the following description of specific embodiments of the invention in conjunction with the accompanying figures.

BRIEF DESCRIPTION OF THE DRAWINGS

In the figures which illustrate by way of example only, embodiments of this invention:

FIG. 1 is a left perspective view of a pump exemplary of an embodiment of the present invention;

FIG. 2 is a right perspective view of a pump body of the pump of FIG. 1;

FIG. 3 is an exploded view of the pump body of FIG. 2;

FIG. 4A is a cross sectional view of a component of the pump of FIG. 1 taken across lines IVa—IVa;

FIG. 4B is a cross sectional of a further component of the pump of FIG. 1 taken across lines IVb—IVb;

FIG. 5A is a right perspective cut away view of the pump body of FIG. 2 along lines V—V;

FIG. 5B is a right elevational view of FIG. 5A;

FIG. 6A is a further right perspective cut away view of the pumping body of FIG. 2;

FIG. 6B is a top plan view of FIG. 6A;

FIGS. 7A and 7B are enlarged sectional views of a portion of the pump body of FIG. 2;

FIGS. 8 and 9 are schematic diagrams illustrating the pump of FIG. 1 in operation; and

FIG. 10 illustrates a multi pump assembly exemplary of another embodiment of the present invention.

DETAILED DESCRIPTION

FIG. 1 illustrates a pump 10 exemplary of an embodiment of the present invention. Pump 10 is well suited to pump fluids at high flow rates and high pressures. Pump 10 includes few moving parts and is relatively lightweight. It is well suited for use in fuel delivery systems and in particular for use in aircraft engines.

As illustrated pump 10 includes a single inlet and outlet. As will become apparent, pump 10 includes three individual pumping chambers housed with a pump body 20. An input manifold 12 distributes a single input to the three chambers. An output manifold 14 combines outputs of the three chambers. A cylindrical connecting pipe 16 interconnects pumping chambers. Pipes 18 interconnect pipe chambers to manifolds 12 and 14, and connecting pipe 16 for fluid coupling as illustrated by the arrows in FIG. 1.

The exterior of pump body **20** is more particularly illustrated in FIG. 2. As illustrated pump body **20** includes an outer housing **22** that is generally cylindrical in shape. At its ends housing **22** is capped by threaded clamps **30a** and **30b**. Three one way flow valves **24a**, **26a**, **28a** near one end of body **20**, and three further one way flow valves **24b**, **26b**, **28b** provide flow communication to three separate pumping chambers within pump body **20**. As illustrated, in the exemplary embodiment three valves **24a**, **26a**, and **28a** are spaced at 120° about the periphery of housing **22**, and extend in a generally radial direction from the center axis of housing **22**. Valves **24b**, **26b** and **28b** are similarly situated near the opposite end of housing **22**.

FIG. 3 is an exploded view of pump body **20**, illustrating its assembly. FIGS. 5A, 5B and 6B are sectional views further illustrating this assembly. As illustrated, pump body **20** includes a lengthwise extending actuator **32**. Preferably actuator **32** is cylindrical in shape. A multi-turn conducting coil **36** surrounds actuator **32** exterior to ceramic sheath **34**. Radially exterior to coil **36** is a further cylindrical sheath **38**. Exterior to sheath **34** is outer housing **22**. Actuator **32**, ceramic sheath **34**, coil **36**, sheath **38** and outer housing **22** are coaxial with a central axis of pump body **20**.

Sheath **38** is preferably formed of a low conductivity soft magnetic material. It may for example be made of ferrite or from laminated or thin film rolled magnetic steel. In the exemplary embodiment, sheath **38** is made from a material made available in association with the trademark SM2 by MII Technologies. Valve seats **40a** and **40b** are similarly preferably formed of a magnetic material.

Sheath **38** and valve seats **40a** and **40b** are preferably formed of a magnetic material, as these at least partially define a magnetic circuit about actuator **32**. The choice of materials affects magnetic losses (such as hysteresis and eddy-current losses) in these components.

Housing **22** is preferably made from a non-magnetic metal such as aluminum, stainless steel, or from a ceramic.

In the example embodiment, coil **36** is formed from about sixty two (62) turns of 15 awg wire. Of course, the number of turns and gauge of coil **36** is governed by its operating voltage, frequency and magnetic requirements (current).

As best illustrated in FIGS. 3, 5A and 5B, actuator **32** is held in its axial position within outer housing **22** at its one end as a result of threaded clamp **30a** providing an inward axial load on actuator **32** by way of a spacer **39a**, valve seat **40a** and spacer rings **42a** and **44a**. At its other end, actuator **32** is held in its axial position as a result of threaded clamp **30b** providing an inward axial load on actuator **32** by way of a spacer **39b**, valve seat **40b** and spacer rings **42b** and **44b**. Spacers **39a** and **39b** are generally disk shaped washers formed of a somewhat resilient material, such as a polymer sold in association with the trademark Vespel. Spacer rings **42a** and **44a** (and **42b** and **44b**) are annular nested rings with ring **42a** having a smaller diameter than ring **44a**. The outer diameter of ring **42a** is about equal to the diameter of actuator **32**. Rings **42a**, **42b**, **44a**, and **44b**, too, are preferably formed of Vespel.

The spacer rings **44a** and **44b** serve three functions. First, spacer rings **44a** and **44b** act as load springs to provide an axial pre-load to actuator **32**. Second, they form a seal at each end of the spacer **39a** and **39b**. Thirdly, they partially define pumping chambers **72a** and **72b**, as detailed below.

Spacer rings **42a** and **42b** similarly serve three functions. First, they provide radial support to actuator **32** to center it coaxial with cylinder **34**. Secondly, rings **42a** and **42b** seal an annular compression chamber **74**, at valve seats **40a** and

40b and sheath **34**. Thirdly, an annular manifold for the annular chamber is formed by the space between the rings **42a** and **44b** (and rings **42b** and **44b**).

The thickness of spacers **39a** and **39b** are chosen so that when the clamps **30a** and **30b** provide the required axial load on actuator **32** as clamps **30a** and **30b** are tightened completely to their mechanical stop. Essentially they are also used as springs. Conveniently spacers **39a** and **39b** also provide an insulated hole through which leads to coil **36** may be passed. Spacers **39a** and **39b** could of course, be replaced by a suitable washer.

Valve housings **40a** and **40b** seat valves **24a**, **26a**, **28a** and **24b**, **26b**, **28b** and provide flow communication between these valves and pumping chambers, as described below.

In the described embodiment of pump **10**, actuator **32** has about a 0.787" diameter and a 4.00" length. Sheath **38** has 1.740" outside diameter, and a 1.560" inside diameter. Housing **22** has a total length of about 8.470". Sheath **34** has an inner diameter of about 0.797" and is about 4.350" length.

Valves **24a**, **24b**, **26a**, **26b**, **28a** and **28b** are conventional high speed check valves preventing flow into associated pumping chambers, capable of operating at about 2.5 KHz. These valves may, for example, be conventional Reed valves. The pressure drop required to open valves **24a**, **24b**, **26a**, **26b**, **28a** and **28b** is preferably less than one (1) psi and the withstanding pressure (in the opposite direction) is over 2000 psi.

Exemplary manifolds **12** and **14** (FIG. 1) are identical in structure illustrated in cross-section in FIG. 4B. Manifold **12** acts as an intake manifold and is thus interconnected with inlet valves **24a** and **28a**. Manifold **14** acts as an output manifold, and is thus interconnected to outlet valves **24b** and **28b**. As illustrated in FIG. 4B, manifolds **12** and **14** each include an axial passageway **50** connecting two openings **52a** and **52b** in a cylindrical body **54**, near its ends. Passageway **50** provides flow communication between these openings **52a**, **52b**. Openings **52a** and **52b** are spaced for interconnection between valves **24a** and **24b** or valves **28a** and **28b** (FIG. 1). Additional openings **56** permit interconnection of pipes **18** to passageway **50**. Preferably, manifolds **12** and **14** are machined from a hard material such as a metal (e.g. stainless steel, brass, copper, etc.).

Exemplary pipe **16** is similarly illustrated in cross section in FIG. 4A. As illustrated, pipe **16**, includes two axial passageways **60a** and **60b** within an outer, generally cylindrical body **58**. Each passageway interconnects and opening **64a** or **64b** for interconnection with valves **26a** and **26b** (FIG. 1). Two additional openings **66** (only one shown) are spaced 90° from each other about the central axis of cylindrical body **58**. Openings **66** allow interconnection of pipes **18** (FIG. 1) for flow communication with one of passageways **60a** and **60b**. Pipe **16** may be machined in a manner, and from a material similar to manifolds **12** and **14**.

Pumping chambers within pumping body **20** are more particularly illustrated in FIGS. 5A, 5B, 6A and 6B. FIGS. 5A and 6A are sectional views of pump body **20**, illustrating its three pumping chambers **72a**, **72b** and **74**. FIG. 5B is a right elevational view of FIG. 5A (and therefore a cross-sectional view of pump body **20**). FIG. 6B is a top plan view of FIG. 6A. As illustrated, two end pumping chambers **72a** and **72b** are generally cylindrical in shape, and are located at distal ends of the lengthwise extent of actuator **32**. Preferably, they are located directly between valve housing **40a** and actuator **32**, and valve housing **40b** and actuator **32**, respectively. They are defined in part by opposite flat ends

5

of actuator **32** and flat ends of valve housing **40a** and **40b**. A further axial pumping chamber **74** is located between the exterior round surface of actuator **32**, and an interior cylindrical surface of sheath **34**. Axial pumping chamber **74** extends axially along the length of actuator **32**, and is sealed at its ends by rings **42a** and **42b**.

As illustrated in FIGS. **5A** and **5B**, axial pumping chamber **74** is in flow communication with valves **26a** and **26b**, by way of passageways **76a** and **76b** formed in valve housings **40a** and **40b**. Valve housing **40b** is identical to housing **40a** and is illustrated more particularly in FIG. **7A**. As illustrated an annulus between rings **42b** and **44b** isolates end chamber **72b** from axial chamber **74** and further provides flow communication from chamber **74** through passageway **76b** to valve **26b**. As will become apparent, fluid may thus be pumped from valve **26a** through chamber **74** and out of valve **26b**.

Cylindrical chamber **72b** is in flow communication with valves **24b** and **28b**, by way of passageways **78b** formed within valve housing **40b**. As such, valve **24b** and valve **28b** act as inlet and outlet valves for end pumping chamber **72b**. Valves **24a** and **28a** similarly serve as inlet and outlet valves, respectively, for pumping chamber **72a**, as illustrated in FIGS. **6A** and **6B**.

Actuator **32** is preferably a cylindrical rod, formed of a conventional magnetostrictive material such as Terfenol-D (an alloy containing iron and the rare earth metals terbium and dysprosium). As understood by those of ordinary skill, magnetostrictive materials change shape in the presence of a magnetic field, while, for all practical purposes, retaining their volume. Actuator **32**, in particular, expands and contracts in a direction along its length and radius in the presence and absence of a magnetic field.

Rings **44** loaded by the force of threaded clamps **30a** and **30b** compress actuator **32** so that in the absence of a magnetic field, actuator **32** is contracted lengthwise. In the presence of a magnetic field actuator **32** lengthens in an axial direction, against the force exerted by rings **44**. All the while the volume of actuator **32** remains constant. As such, an axial lengthening is accompanied by a radial contraction of actuator **32**.

The expansion of actuator **32** in the presence of a magnetic field is a complex function of load, magnetic field and temperature but may be linear over a limited range. The expansion of Terfenol-D is in the range of 1200 to 1400 parts per million under proper load conditions and optimum magnetic field change. Example actuator **32**, which is about 4" long, will expand about 0.0056" along its length while contracting in diameter about 0.00055" (static diameter is 0.787").

Operation of pump **10** may better be appreciated with reference to the schematic illustration of pump body **20** depicted in FIGS. **8** to **9**. In operation, a source of alternating current (AC) source of electric energy **80** is applied to lead of coil **36**. The frequency for example of the applied current could in this case be 1.25 KHz resulting in this arrangement of a lengthwise contraction expansion frequency of 2.5 KHz (the rod will expand with either polarity of applied magnetic field). Coil **36**, in turn, generates an alternating magnetic field with flux lines along the axis of actuator **32**. Sheath **38** forms a magnetic guide causing flux generated by coil **36** to be directed into and out of the ends of the rod, through valve seats **40a** and **40b**.

Conveniently, eddy current losses kept at a minimum in housing **22** and the valve seats **40a** and **40b**.

A fluid to be pumped is provided by way of the inlet of pump **10** (FIG. **1**), pipes **16**, and **18**, and inlet manifold **12**.

6

Sheath **38** (FIG. **4**) electrically insulates pump **10**, so that current carried by coil **36** does not create substantial electromagnetic interference beyond housing **22**.

As a result of the varying magnetic field generated by coil **36** and source **80**, the shape of actuator **32** oscillates between a first state as illustrated in FIG. **8**, and a second state as illustrated in FIG. **9**. Transitions between these two states, in turn, cause changes in volume of pumping chambers **72a**, **72b** and **74**, allowing these to act as positive displacement pumps.

As sheath **34** is made of a hard material such as ceramic, a radial expansion of actuator **32** and resulting displacement of the fluid within cavity **74** is resisted by sheath **34**.

Specifically, as illustrated in exaggeration in FIG. **8**, in a first state, actuator **32** has a minimum length and a maximum diameter. Chambers **72a** and **72b**, in turn, have increased volumes, resulting in reduced pressures therein, allowing passage of liquid through valves **24a** and **24b**, and preventing flow of liquid through valves **28a** and **28b**. Liquid may thus be drawn into chambers **72a** and **72b**. At the same time, the volume of chamber **74** is reduced, and liquid therein is displaced by actuator **32**. One-way valve **26a** is opened, while valve **26b** is closed, allowing fluid to be expelled from axial chamber **74**.

As current flow of the source **80** varies, actuator **32** begins to expand axially and contract radially. One quarter period of oscillation of the electric source later, actuator **32** is in a second state, as illustrated in exaggeration in FIG. **9**. In this state, actuator **32** has maximum length, and minimum diameter. As the length of actuator **32** increased it, in turn, displaces fluid in chambers **72a** and **72b**, increasing the pressure therein. At the same time, the volume of chamber **74** increases as a result of the radial contraction of actuator **32**. The pressure in chamber **74**, in turn, decreases. Valves **24a** and **24b** are closed, and valves **28a** and **28b** are open, allowing liquid to be expelled from chambers **72a** and **72b** through valves **28a** and **28b**. Similarly, valve **26b** is opened and valve **26a** is closed. Effectively, the pumping cycles of chamber **72a** and **72b** are in phase with each other, and 180° out of phase with chamber **74**.

For example pump **10**, the total change (i.e. between minimum and maximum diameters of actuator **32**) in the volume of axial pumping chamber **74** is 0.00274 cubic inches. As the annular chamber **74** expands and contracts twice in each cycle twice this volume could be displaced if there is little or no leakage and little or no compression of the working fluid. Thus, the displacement volume of chamber **74** is 0.00274 cubic inches per cycle of the actuator. Combining the displacement of chamber **74** with chambers **72a** and **72b** results in a total pump displacement of 0.0054 cubic inches per cycle of actuator **32**. Thus at an excitation frequency (in the coil) of 1.25 KHz (corresponding to an actuator cycle frequency of 2.5 KHz) results in displacement of 2.5 KHz*0.0054 cu in=13.62 cubic inches per second or about 0.223 L/s. Thus, chambers **72a**, **72b** and **74** may produce a combined flow of up to about 1300 liters per hour at up to 4000 psi.

The pressure delivery of the pump depends on the compressibility of the pumped fluid as the cycle to cycle displacement is relatively small. However the pressure available from the Terfenol is in excess of 8000 psi. Although impractical, if the fluid where not compressible the above noted flow rate previously calculated at 8000 psi might be realizable under ideal non leakage conditions. A practical result is expected to be up to 4000 psi at flow rates of up to 0.12 L/s for a single pump chamber.

Conveniently, pipes **16** and **18**, and outlet manifold **14** join the output of pumping chambers **72a**, **72b** and **74** allowing these to act in tandem. Advantageously, as chambers **72a** and **72b** are 180° out of phase with pumping chamber **74**, interconnection of the three chamber provides a smooth pumping action, with two compression cycles for every cycle of actuator **32**. Additionally, location of pumping chambers around the entire outer surface of actuator **32** allows forces within pump **10** to be balanced, reducing overall vibration of pump **10**, during operation. Specifically, as the pressure of pumped fluid is equal all round actuator **32**, net side forces are eliminated as a result and lateral vibration of the actuator **32** is reduced. The forces on actuator **32** due to pressure in the axial direction are balanced because the pressures from which the axial cavities are charged and discharged are the same because they are connected together and the end cavities are in phase.

More significantly, however, are the vibrational forces. If actuator **32** were fixed at one end, the acceleration forces related to the vibration of the actuator are reacted at the one end resulting in inertially related vibrations. In pump **10** two opposite ends of the actuator **32** accelerate in equal and opposite directions resulting in equal and opposite inertial forces which cancel. This results in a balanced system resulting in significantly less vibration and noise than could be obtained in conventional imbalanced arrangements.

FIG. **10** further illustrates a multi-pump, pump assembly **100** including a plurality (three are illustrated) of pumps **102**, each substantially identical to pump **10** (FIG. **1**). As illustrated, pipes **18** interconnect pumps **102**. Inputs and outputs of pumps **102** are connected in parallel. Pump assembly **100** may be beneficial if higher flow rates are required.

Conveniently, each pump of the pump assembly **100** may be driven out of phase from the remaining pumps. For example, for a three pump assembly, each pump **102** may be driven from one phase of a three phase power source (not shown), so that each pump **102** further smoothing any pressure fluctuations in output of any pump **102**. Additionally this arrangement allows for redundancy as is often required for high reliability systems. Failure of one of the pumps **102** or one of the electrical phases would not cause total loss of flow.

Pump assembly **100** could similarly be arranged with inputs and outputs of pumps **102** interconnected in series. In this way, each pump **102** would incrementally increase pressure of a pumped fluid.

As should now be appreciated, the above described embodiments may be modified in many ways without departing from the present invention.

For example a pump and pump assembly could be machined and manufactured in many ways. One or more pumps may be cast in a body that does not have an outer cylindrical shape. Fluid conduit from and between pumps could be formed integrally in the cast body. Valves need not be arranged radially at 120° about an axis of an actuator, but could instead be arranged in along one or more axis of a body defining the pump.

An exemplary pump having only two pumping chambers will provide many of the above described benefits. For example, a pump having only two in-phase chambers (like end chambers **72a**, **72b**) driven by a single actuator may provide a balanced pump, with relatively few moving parts having only a single pumping stroke for a cycle of an actuator. Similarly, a pump having two chambers driven by a single actuator, with each of the pump chambers 180° out of phase with the other may provide relatively smooth pumping action. Of course, a pump having more than three chambers could be similarly formed.

Of course, a pump embodying the present invention may be formed with many configurations, in arbitrary shapes. For example, the pump assembly, housing and actuator need not be cylindrical. Similarly, pumping chambers need not be directly defined by a magnetostrictive element. Instead, an actuator may be mechanically coupled to the pumping chambers in any number of known ways. For example, the pumping chamber could be formed of a bellows driven a magnetostrictive actuator.

All documents referred to herein, are hereby incorporated by reference herein for all purposes.

Of course, the above described embodiments, are intended to be illustrative only and in no way limiting. The described embodiments of carrying out the invention, are susceptible to many modifications of form, arrangement of parts, details and order of operation. The invention, rather, is intended to encompass all such modification within its scope, as defined by the claims.

What is claimed is:

1. A pump comprising:

a piston formed of a magnetostrictive material susceptible to changes in physical dimensions in the presence of a magnetic field; and

first and second pumping chambers coupled to said magnetostrictive element to vary in volume as said magnetostrictive element changes shape,

wherein said first and second pumping chambers are driven by opposite ends of said magnetostrictive element, to change volume in phase with each other.

2. The pump of claim 1, wherein said magnetostrictive element has a lengthwise extent, and said first and second pumping chambers are driven by opposite ends of said element at opposite ends of said lengthwise extent.

3. The pump of claim 2, wherein said pumping first and second chambers are located at opposing ends of said lengthwise extent.

4. The pump of claim 1, further comprising a third pumping chamber, driven by said magnetostrictive element to pump out of phase with said first and second pumping chambers.

5. A pumping assembly, comprising a plurality of pumps in accordance with claim 1, wherein inputs and outputs of said plurality of pumps are interconnected in parallel.

6. The pumping assembly of claim 5, wherein each of said plurality of pumps is driven out of phase with each other one of said plurality of pumps.

7. The pumping assembly of claim 6, comprising three pumps.

8. A pumping assembly, comprising a plurality of pumps in accordance with claim 1, wherein inputs and outputs of said plurality of pumps are interconnected in series.

9. A method of pumping fluid using a magnetostrictive element comprising:

applying a magnetic field to a magnetostrictive element to cause lengthwise extension of said element at two opposing ends;

driving a first pumping chamber through said extension of a first end of said two opposing ends;

driving a second pumping chamber through said extension of a second of said two opposing ends, opposite said first end, wherein said first pumping chamber is driven in phase with said second pumping chamber.

10. The method of claim 9, further comprising allowing said magnetostrictive element to contract lengthwise, and extend widthwise;

driving a third pumping chamber with said widthwise expansion of said magnetostrictive element.