

(12) **United States Patent**
Dooley et al.

(10) **Patent No.:** **US 7,545,056 B2**
(45) **Date of Patent:** **Jun. 9, 2009**

(54) **SATURATION CONTROL OF ELECTRIC MACHINE**

See application file for complete search history.

(75) Inventors: **Kevin Allan Dooley**, Mississauga (CA);
Joshua David Bell, Toronto (CA)

(56) **References Cited**

(73) Assignee: **Pratt & Whitney Canada Corp.**,
Longueuil (CA)

U.S. PATENT DOCUMENTS

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 397 days.

1,685,970 A	10/1928	Townend et al.
1,723,090 A	8/1929	Stevenson, Jr.
2,291,008 A	7/1942	Tyrner
2,564,320 A	8/1951	Brainard
2,886,762 A	5/1959	Polasek
2,939,069 A	5/1960	Dvoracek
3,243,688 A	3/1966	Brundage
3,344,338 A	9/1967	Sparrow

(21) Appl. No.: **11/420,614**

(Continued)

(22) Filed: **May 26, 2006**

FOREIGN PATENT DOCUMENTS

(65) **Prior Publication Data**

CA 2051626 8/1991

US 2006/0226721 A1 Oct. 12, 2006

(Continued)

Related U.S. Application Data

OTHER PUBLICATIONS

(63) Continuation-in-part of application No. 10/996,411, filed on Nov. 26, 2004, now Pat. No. 7,262,539, which is a continuation of application No. 10/444,952, filed on May 27, 2003, now Pat. No. 6,965,183.

General Electric Company, "150Kva Samarium Cobalt VSCF Starter/Generator Electrical System, Final Technical Report", 1979.

(Continued)

(51) **Int. Cl.**
H02J 3/38 (2006.01)
H02J 3/46 (2006.01)
H02P 5/00 (2006.01)
H02P 5/74 (2006.01)
H02H 7/06 (2006.01)



Primary Examiner—Burton Mullins
(74) *Attorney, Agent, or Firm*—Ogilvy Renault LLP; Todd D. Bailey

(57) **ABSTRACT**

(52) **U.S. Cl.** **307/84**; 318/495; 307/153; 361/20; 361/23; 310/112; 310/180; 322/22
(58) **Field of Classification Search** 310/184, 310/113, 180, 187, 254; 322/57, 90, 63, 322/66, 89, 93; 307/52, 84, 153; 318/495, 318/498, 500, 503, 504, 508, 509, 511, 512, 318/513

The invention includes an electric alternator/motor having a rotor, stator and at least one winding in the stator adapted to conduct a current, the machine also having and first and second magnetic circuits, one of which includes a saturable portion in which saturation may be controlled to permit control of the machine.

7 Claims, 11 Drawing Sheets

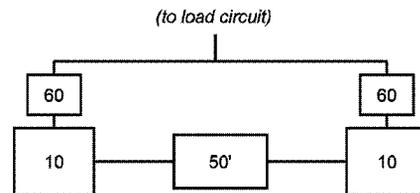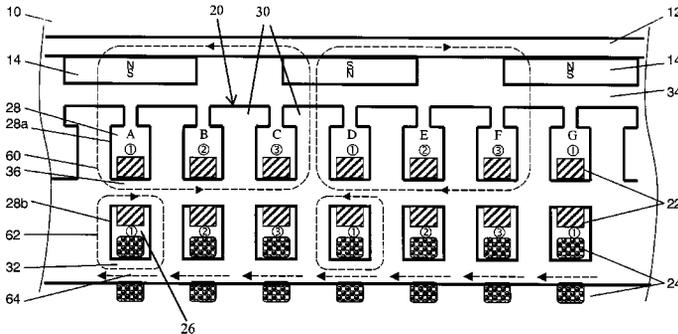

U.S. PATENT DOCUMENTS

3,671,788	A	6/1972	Knudson et al.	6,239,532	B1	5/2001	Hollenbeck et al.
3,707,638	A	12/1972	Nailen	6,242,840	B1	6/2001	Kenk et al.
3,753,068	A	8/1973	Walker, Jr.	6,255,756	B1	7/2001	Richter
3,812,441	A	5/1974	Sakamoto et al.	6,271,613	B1	8/2001	Akemakou et al.
3,866,110	A	2/1975	Ruggeri	6,286,199	B1	9/2001	Bobay et al.
3,961,211	A	6/1976	Vergues	6,313,560	B1	11/2001	Dooley
3,986,062	A	10/1976	Morrill	6,323,625	B1	11/2001	Bhargava
4,004,202	A	1/1977	Davis	6,342,746	B1	1/2002	Flynn
4,032,807	A	6/1977	Richter	6,373,162	B1	4/2002	Liang et al.
4,039,910	A	8/1977	Chirgwin	6,429,615	B2	8/2002	Schmider et al.
4,138,629	A	2/1979	Miller et al.	6,437,529	B1	8/2002	Brown
4,237,395	A	12/1980	Loudermilk	6,504,261	B2	1/2003	Fogarty et al.
4,250,128	A	2/1981	Meckling	6,525,504	B1	2/2003	Nygren et al.
4,305,031	A	12/1981	Wharton	6,541,887	B2	4/2003	Kawamura
4,346,335	A	8/1982	McInnis	6,781,331	B2	8/2004	Mokri et al.
4,392,072	A	7/1983	Rosenberry	6,965,183	B2	11/2005	Dooley
4,401,906	A	8/1983	Isobe et al.	7,126,313	B2	10/2006	Dooley
4,445,061	A	4/1984	Jackson, Jr.	2002/0047455	A1	4/2002	Dhyanchand et al.
4,492,902	A	1/1985	Ficken et al.	2002/0084705	A1	7/2002	Kawamura
4,503,377	A	3/1985	Kitabayashi et al.	2002/0084715	A1	7/2002	Kakuta et al.
4,511,831	A	4/1985	McInnis	2002/0093252	A1	7/2002	Kang et al.
4,547,713	A	10/1985	Langley et al.	2002/0149281	A1	10/2002	Saint-Michel et al.
4,562,399	A	12/1985	Fisher	2004/0183392	A1	9/2004	Dooley
4,605,874	A	8/1986	Whiteley	2004/0239202	A1	12/2004	Dooley
4,617,726	A	10/1986	Denk	2005/0146307	A1	7/2005	Dooley et al.
4,625,135	A	11/1986	Kasabian	2006/0113967	A1	6/2006	Dooley
4,638,201	A	1/1987	Feigel	2007/0024249	A1	2/2007	Dooley
4,656,379	A	4/1987	McCarty				
4,709,180	A	11/1987	Denk				
4,713,570	A	12/1987	Mastromattei				
4,763,034	A	8/1988	Gamble				
4,799,578	A	1/1989	Matsushita				
4,851,758	A	7/1989	Osada et al.				
4,852,245	A	8/1989	Denk				
4,887,020	A	12/1989	Graham				
4,896,756	A	1/1990	Matsushita				
4,897,570	A	1/1990	Ishikawa et al.				
4,924,125	A	5/1990	Clark				
5,030,877	A	7/1991	Denk				
5,184,040	A	2/1993	Lim				
5,235,231	A	8/1993	Hisey				
5,245,238	A	9/1993	Lynch et al.				
5,260,642	A	11/1993	Huss				
5,304,883	A	4/1994	Denk				
5,397,948	A	3/1995	Zoerner et al.				
5,519,275	A	5/1996	Scott et al.				
5,555,722	A	9/1996	Mehr-Ayin et al.				
5,585,682	A	12/1996	Konicek et al.				
5,742,106	A	4/1998	Muraji				
5,770,901	A	6/1998	Niimi et al.				
5,793,137	A	8/1998	Smith				
5,798,596	A	8/1998	Lordo				
5,822,150	A	10/1998	Kelsic				
5,825,597	A	10/1998	Young				
5,834,874	A	11/1998	Krueger et al.				
5,838,080	A	11/1998	Couderchon et al.				
5,903,115	A	5/1999	Taylor				
5,912,522	A	6/1999	Rivera				
5,917,248	A	6/1999	Seguchi et al.				
5,925,999	A	7/1999	Lakerdas et al.				
5,936,325	A	8/1999	Permuy				
5,942,829	A	8/1999	Huynh				
5,952,757	A	9/1999	Boyd, Jr.				
5,953,491	A	9/1999	Sears et al.				
5,955,809	A	9/1999	Shah				
5,962,938	A	10/1999	Bobay et al.				
6,011,338	A	1/2000	Bell et al.				
6,097,124	A	8/2000	Rao et al.				
6,100,620	A	8/2000	Radovsky				
6,114,784	A	9/2000	Nakano				
6,154,019	A	11/2000	Valdemarsson et al.				

FOREIGN PATENT DOCUMENTS

DE	3430590	A1	2/1986
DE	3430188		8/1989
EP	368930		4/1994
EP	754365		2/1998
EP	750806		8/1998
EP	0909010	*	4/1999
EP	1 235 327	A2	8/2002
EP	1 235 327	A3	8/2002
FR	1555855		12/1968
FR	2618616		7/1987
GB	2 184 609	A	6/1987
JP	55-061625		5/1980
JP	1-138936		5/1989
JP	1-138938		5/1989
JP	6 237 561		8/1994
JP	7 039 122		2/1995
JP	7 075 213		3/1995
JP	9 205 743		8/1997
JP	2001-16887		1/2001
JP	2002-191158		7/2002
JP	2002-291216		10/2002
JP	2003-102159		4/2003
WO	WO 90/10971		9/1990
WO	WO 91-12647		8/1991
WO	99/09638		2/1999
WO	99/66624		12/1999
WO	02/09260		1/2002
WO	03/003546		1/2003
WO	WO 03/023939		3/2003
WO	03/028202		4/2003

OTHER PUBLICATIONS

M. Cronin, "The All-Electric Airplane as Energy Efficient Transport", SAE Journal, 1980.

Richter, E. et al., "Jet Engine Integrated Generator", Aeronautics & Astronautics, 1981.

B. Dishner et al., "A Novel Electromechanical Approach to Constant Frequency Power Generation", IEEE Journal, 1989.

M. Cronin, "The All-Electric Airplane Revisited", SAE Technical Series, 1989.

SAE Technical Paper Series 892252, Application Considerations for Integral Gas Turbine Electric Starter/Generator revisited. 1989.

The Applicability of Electrically Driven Accessories for Turboshaft Engines, 1993.

R. Nims, "Development of an Oilless, Gearless, and Bleedable under Armour Power Unit", ASME paper, 1995.

Richter et al., "Preliminary Design of an Internal Starter/Generator for Application in the F110-129 Engine", SAE Aerospace Atlantic Conference, 1995.

R. Nims, "Armor-plated auxiliary power", Mechanical Engineering, 1997.

PCT International Search Report for International application No. PCT/CA2004/000689 mailed Sep. 16, 2004.

Kevin Allan Dooley, "Saturation control of electric machine", U.S. Appl. No. 10/996,411, filed Nov. 26, 2004.

International Search Report PCT/CA2005/001657, Feb. 22, 2006.

U.S. Appl. No. 11/379,620, filed Apr. 21, 2006, by Kevin Allan Dooley.

U.S. Appl. No. 11/420,602, filed May 26, 2006, by Kevin Allan Dooley.

U.S. Appl. No. 11/533,548, filed Sep. 20, 2006, by Kevin Allan Dooley.

* cited by examiner

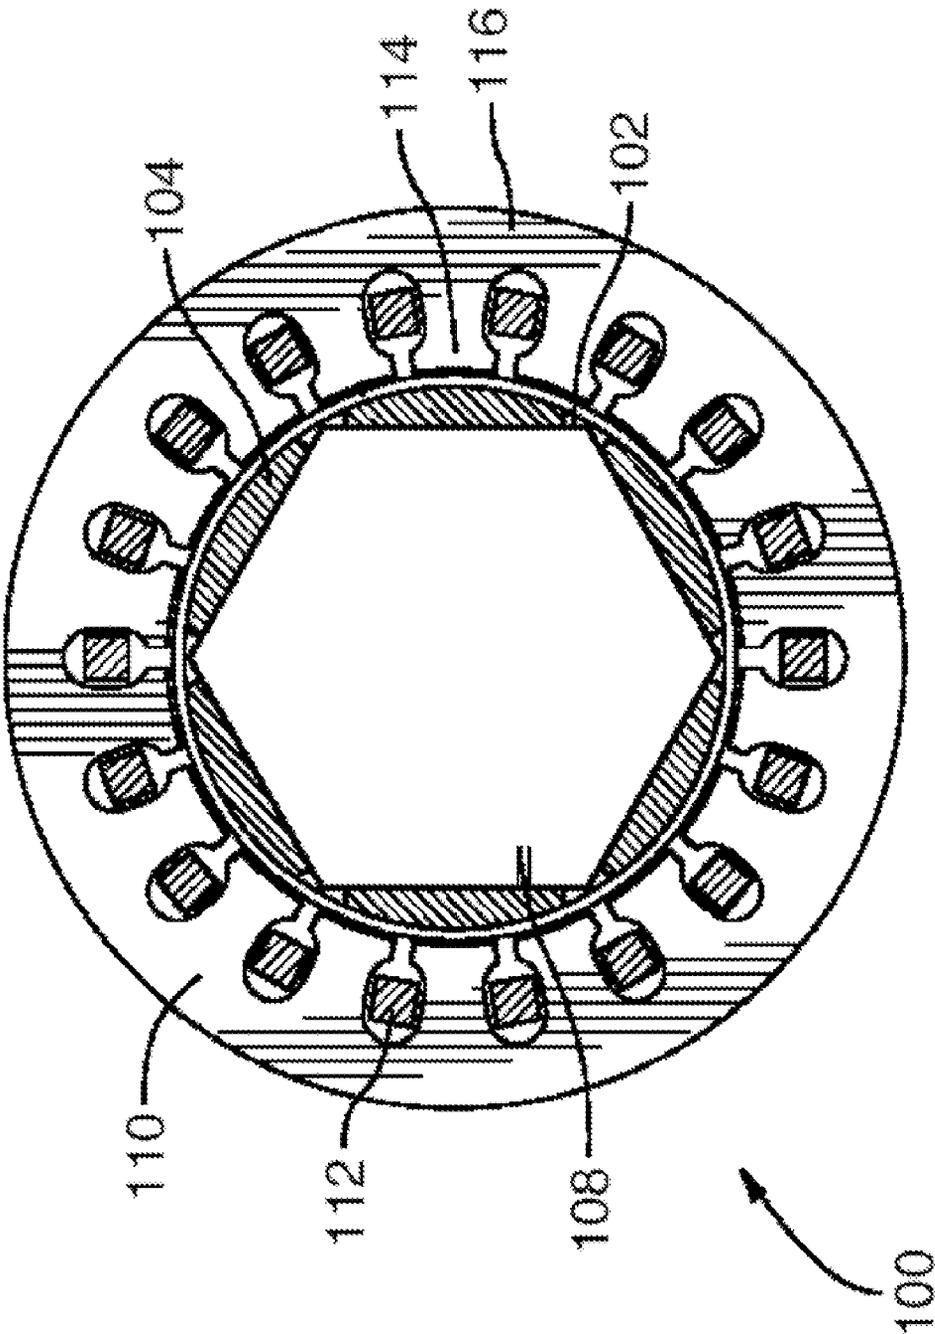


FIG. 1
(Prior Art)

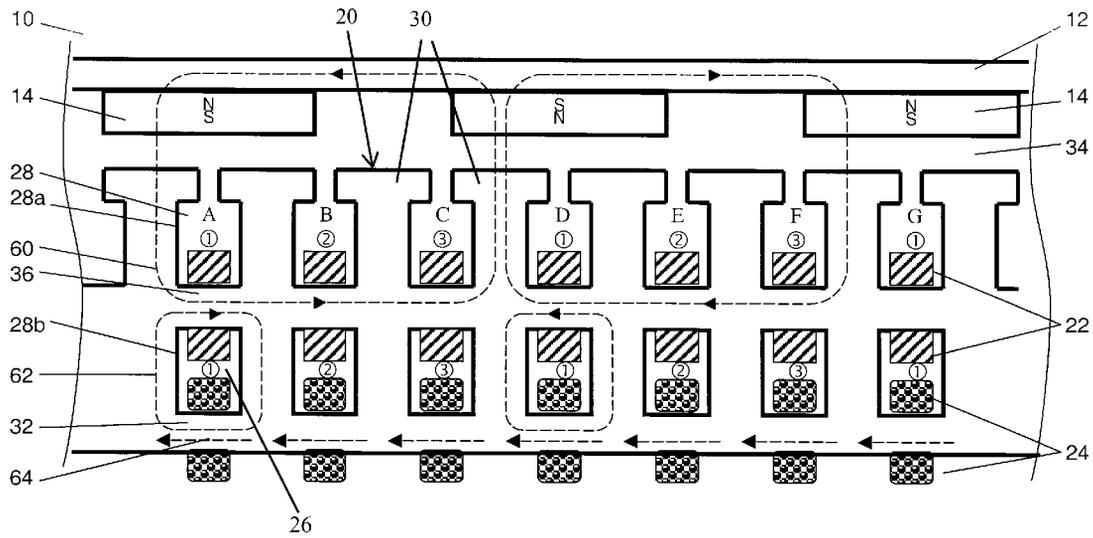


Figure 2

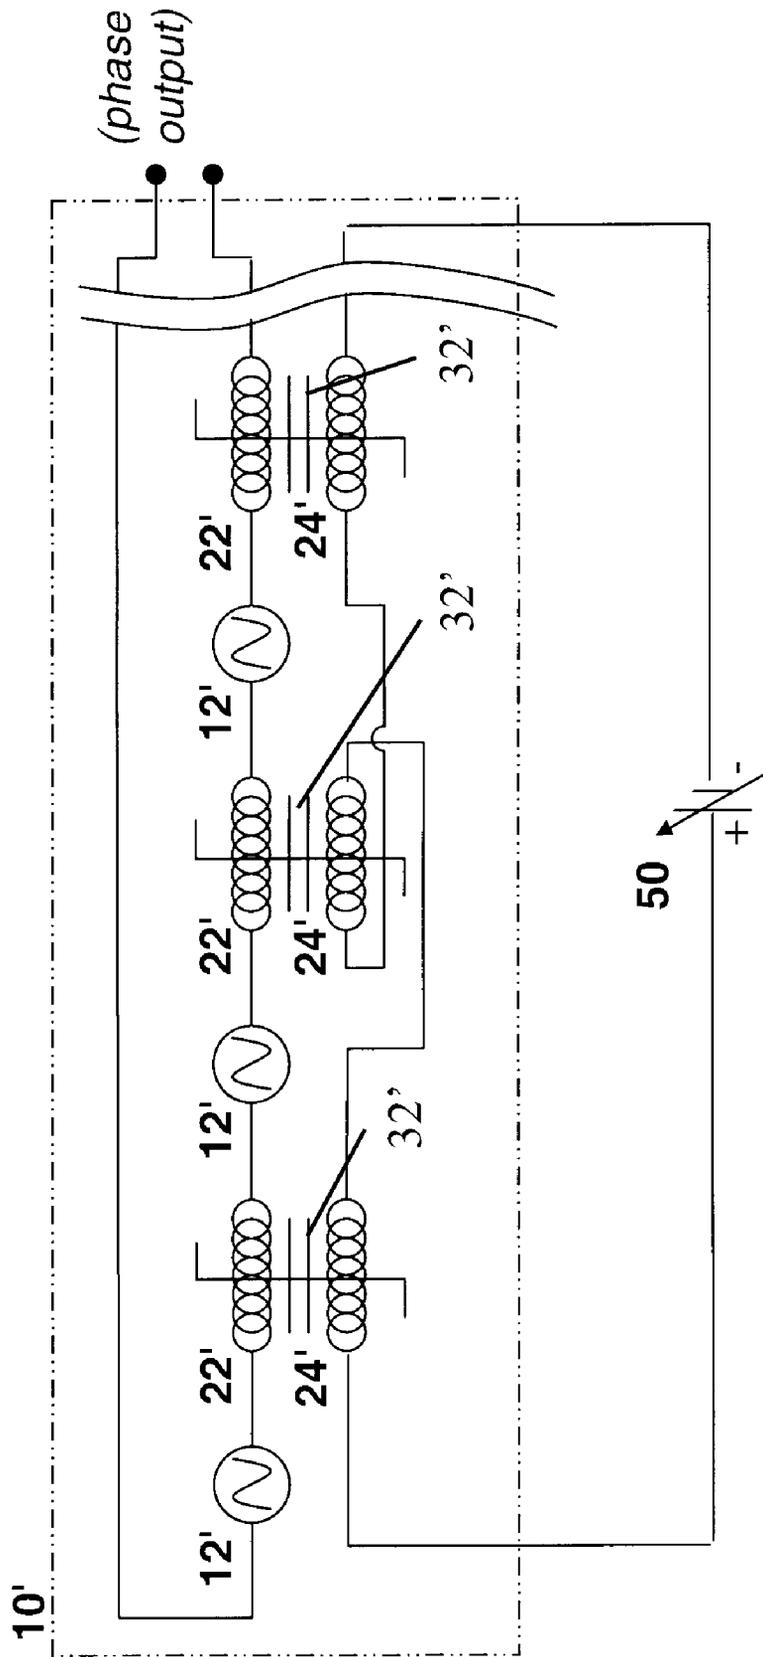


Figure 3

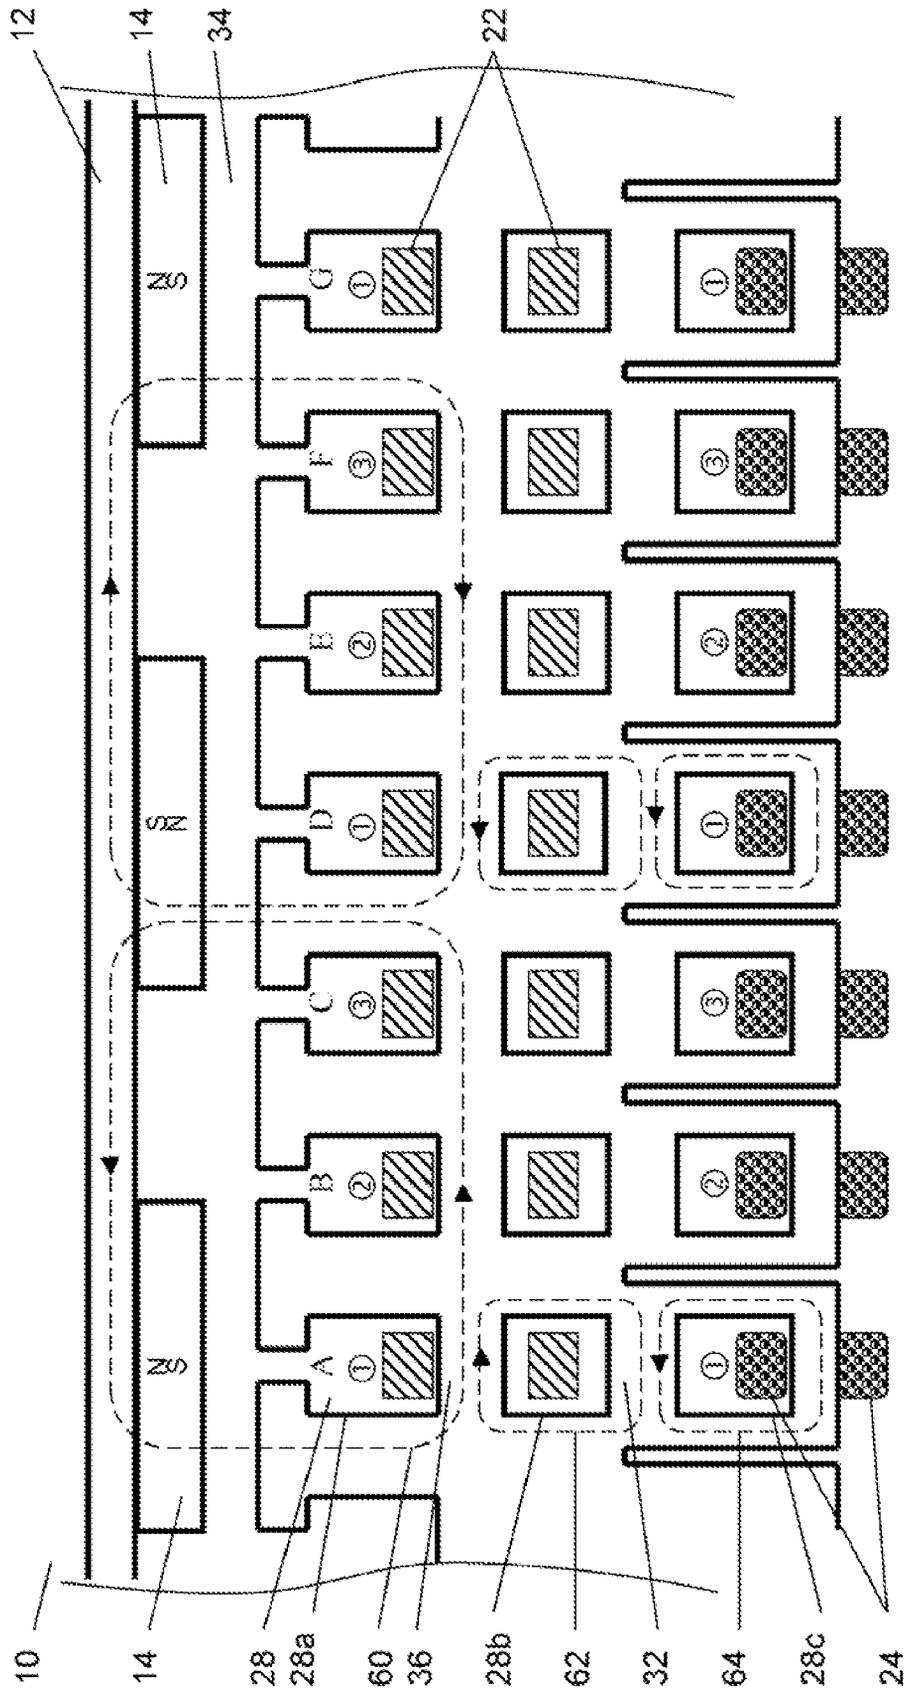


Figure 4

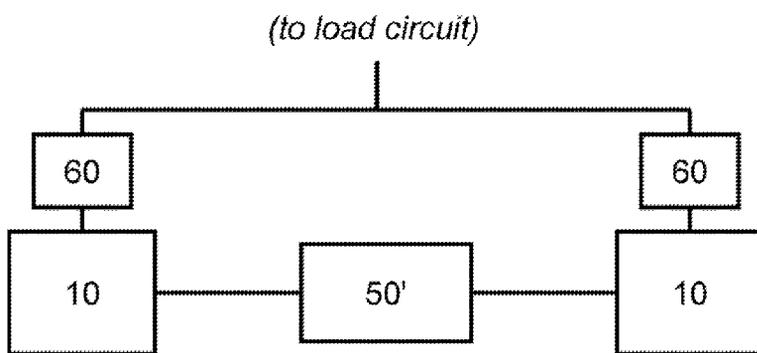


Figure 5

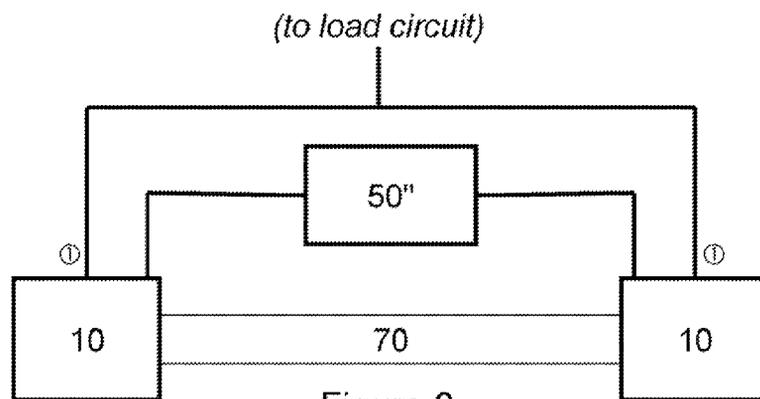


Figure 6

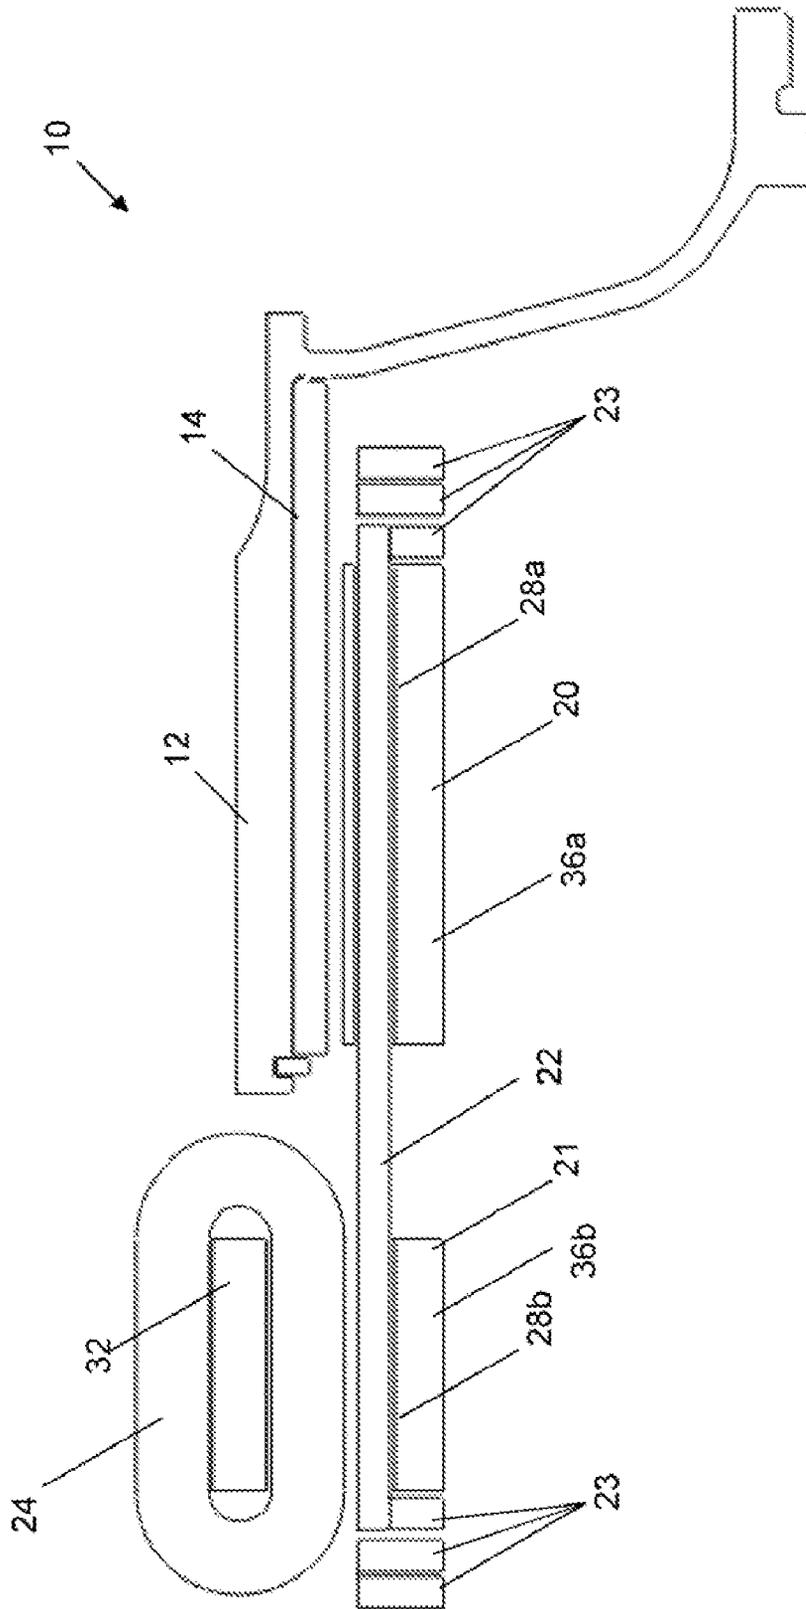


Figure 7

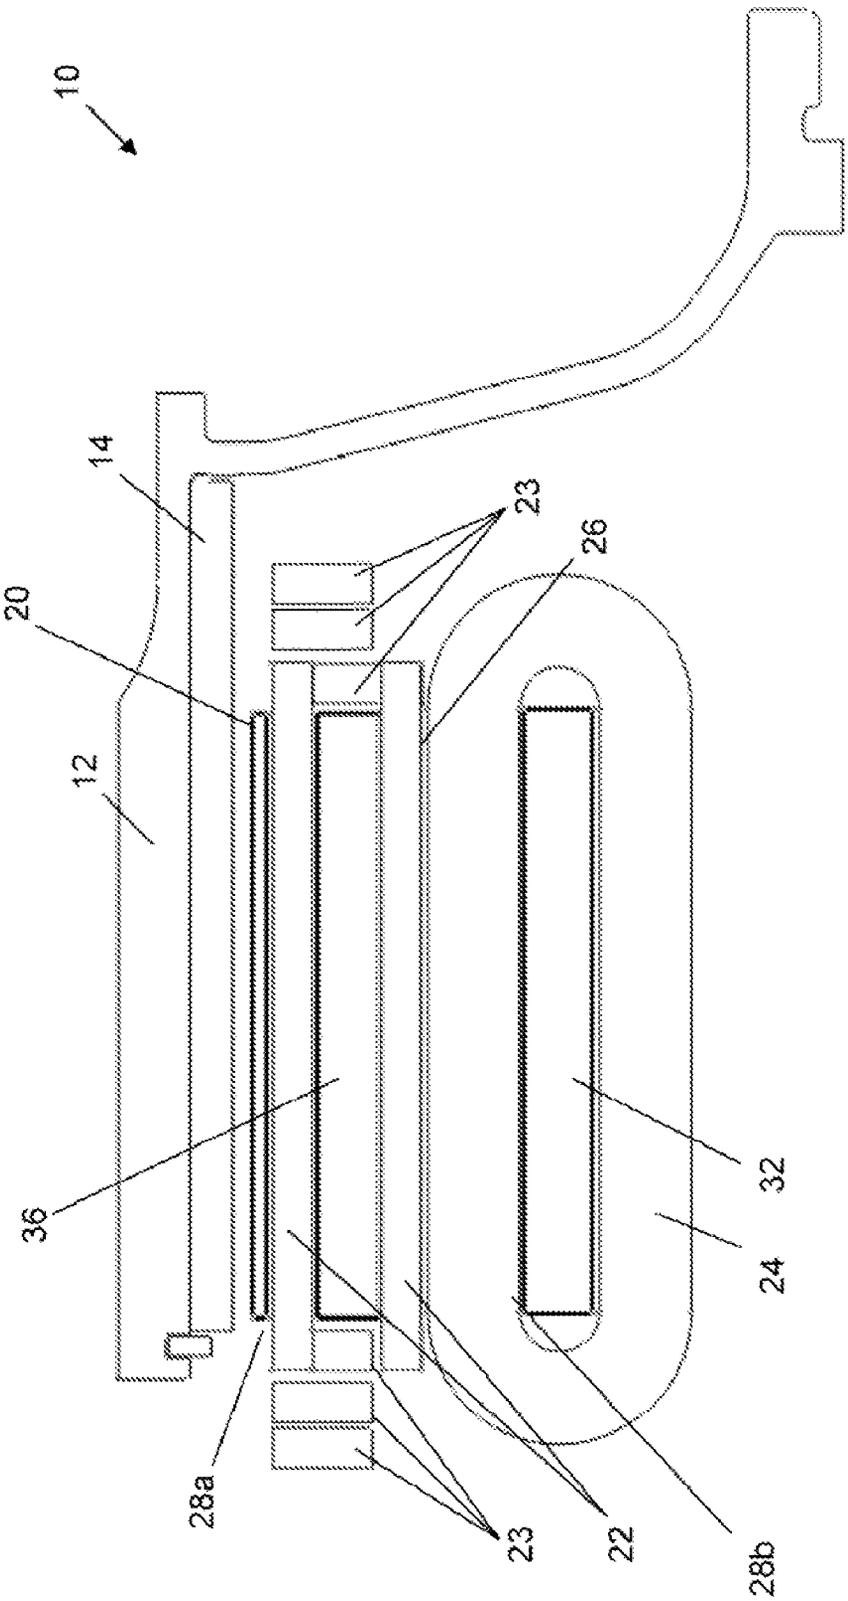


Figure 8

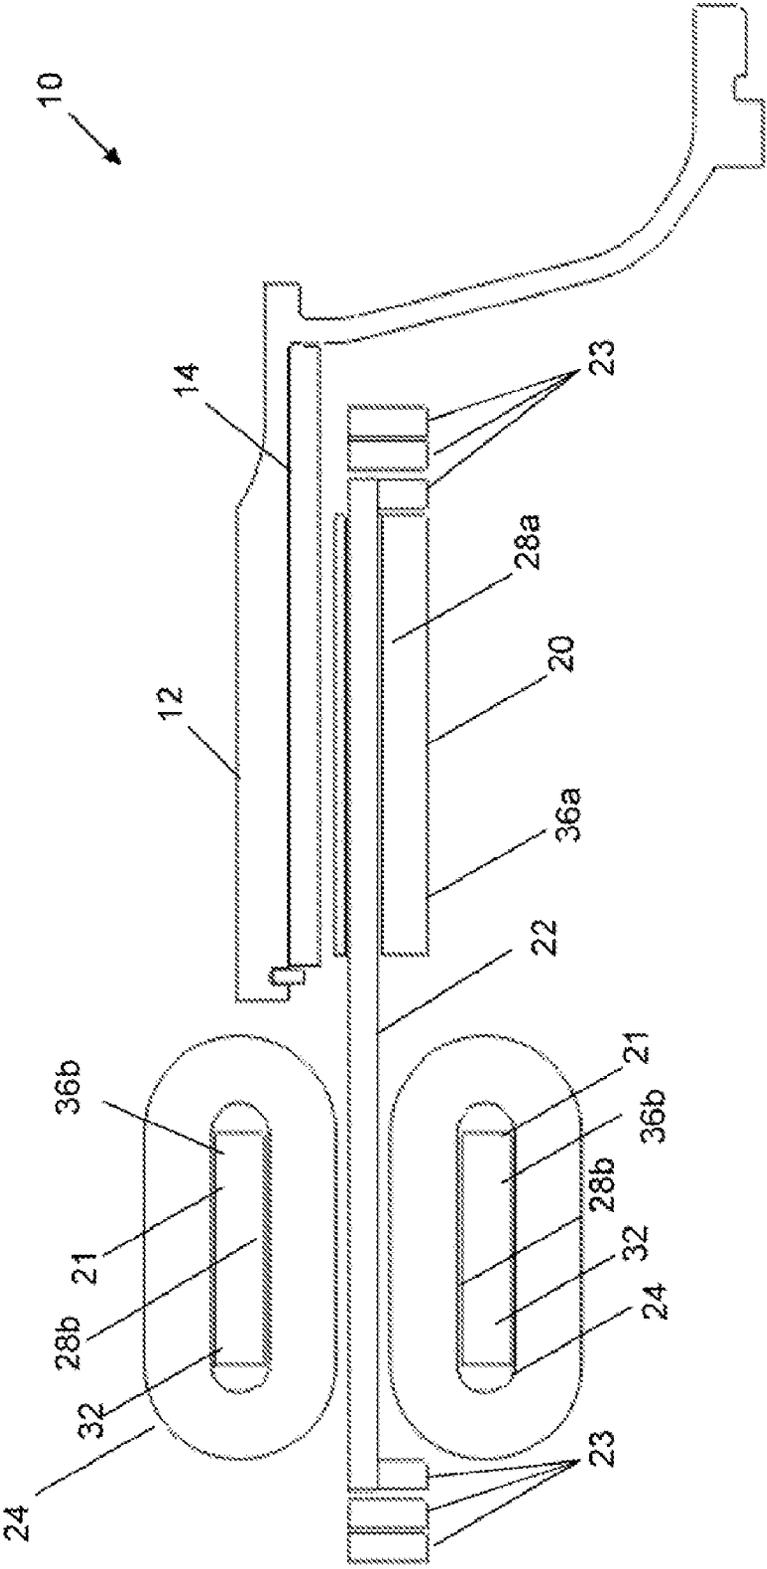


Figure 9

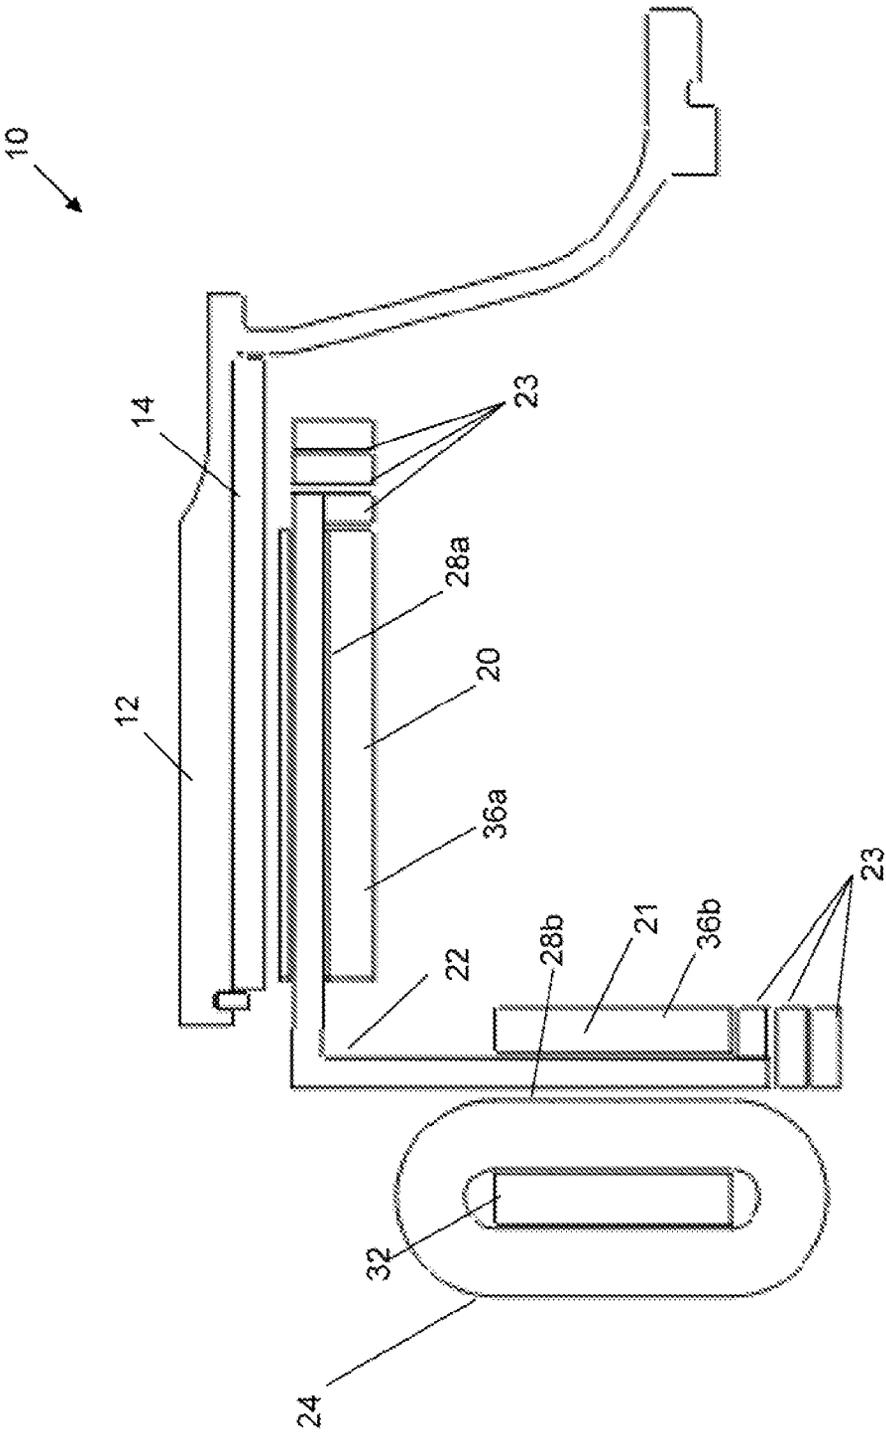


Figure 11

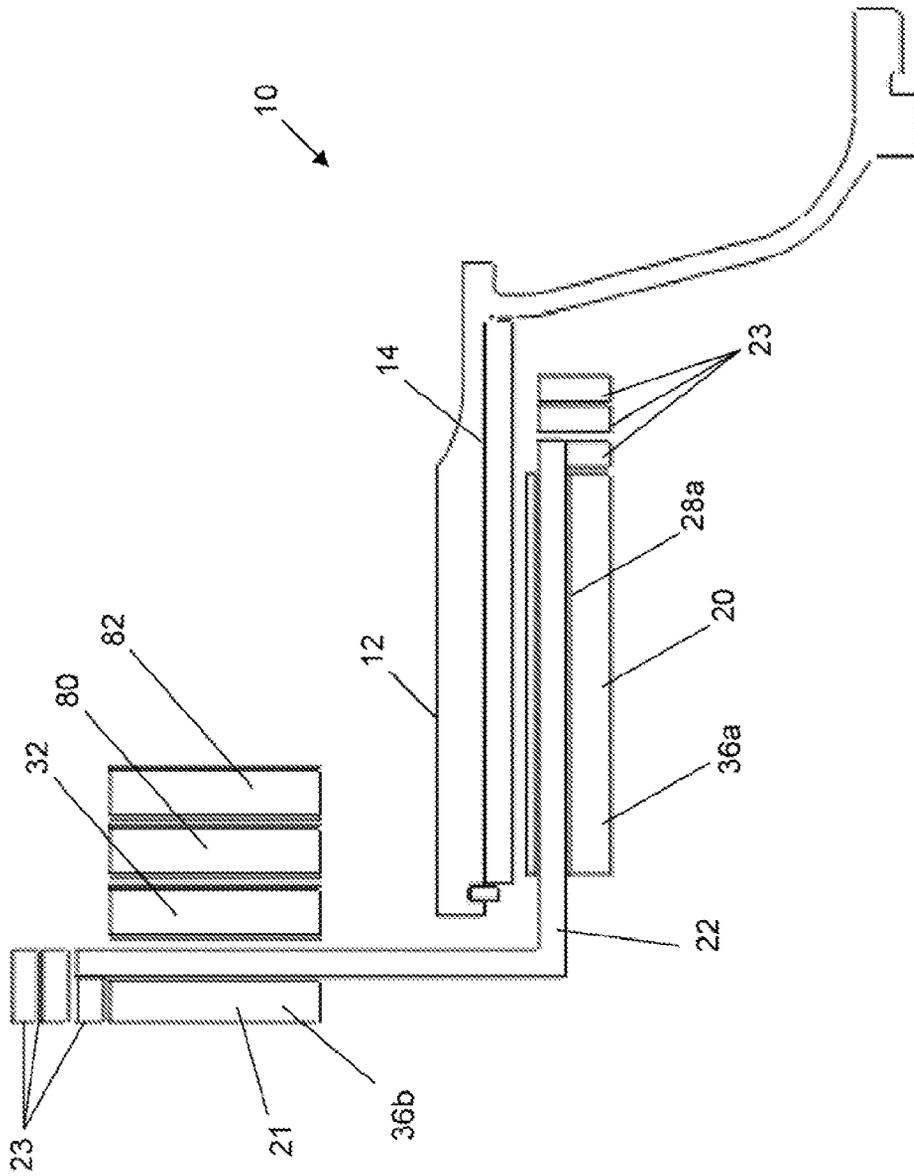


Figure 12

1

SATURATION CONTROL OF ELECTRIC MACHINE

CROSS REFERENCE TO EARLIER APPLICATION

This application is a continuation-in-part of applicant's U.S. patent application Ser. No. 10/996,411, filed Nov. 26, 2004 now U.S. Pat. No. 7,262,539 which is itself a continuation of U.S. patent application Ser. No. 10/444,952, filed May 27, 2003 now U.S. Pat. No. 6,965,183, the contents of which are incorporated by reference into this application.

TECHNICAL FIELD

The invention relates to electric machines such as alternators and motors and in particular to the control of such machines

BACKGROUND OF THE ART

Referring to FIG. 1, a typical permanent magnet (PM) alternator or motor has a rotor **102** supporting permanent magnets **104** and mounted on a rotatable shaft **108**. A stator **110** has a plurality of windings **112** between a plurality of teeth **114** mounted to a back iron **116**. (For ease of illustration, the adjacent elements of windings **112** in FIG. 1 are shown unconnected.) When operated in an alternator mode, an external torque source forces rotation of the shaft, and the interaction of the magnets and the windings causes a magnetic flux to loop the windings in the slots. As magnetic flux varies due to rotor rotation, voltage is generated in windings **112**, which results in an output current when a load is connected to the output of the machine. When operated in a motor mode, voltage from an external source (not shown) is applied to windings **112**, and the resulting current induces magnetic flux in the stator and rotor which, when appropriately controlled, causes the rotor to rotate to produce torque. PM machines can have an "inside rotor" configuration as shown in FIG. 1 or an "outside rotor" configuration (not shown).

The output voltage and frequency of prior art PM alternators is determined by rotor speed, which present challenges where rotor speed cannot be independently controlled. It would therefore be desirable to improve the controllability of electric machines, generally, and in particular PM machines.

SUMMARY OF THE INVENTION

In one aspect, the present invention provides an electric machine operable as at least one of an electric alternator/generator and an electric motor, the machine having a rotor and a stator, the stator assembly including at least a stator electrical winding, the machine comprising a first magnetic circuit defined in the rotor and stator and encircling at least a first portion of the first winding a second magnetic circuit defined in the stator assembly and encircling at least a second portion of the first winding, the second magnetic circuit remote from the first magnetic circuit and including a portion which is magnetically saturable, and a saturation control apparatus adapted to controllably varying a saturation level of said saturable portion.

In another aspect, the invention provides a method of regulating operation of an electrical machine, the method involving at least one electric machine having a magnetic rotor, a stator and at least one stator winding, the winding associated with a primary magnetic circuit defined by the rotor and stator, the winding also associated with a secondary magnetic

2

circuit defined in the stator, the secondary magnetic circuit remote from the first magnetic circuit and including a magnetically saturable portion, the method comprising the steps of operating the machine to provide at least one of generated output electrical power in the winding and motive power as a result of current supplied to the winding, and controllably varying a saturation level of a portion of the secondary magnetic circuit to thereby control operation of the machine.

Still other inventions and aspects are disclosed in this specification and attached figures, as well, and the present application claims all such inventions.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention and to show more clearly how it may be carried into effect, reference will now be made by way of example to the accompanying drawings, showing articles made according to preferred embodiments of the present invention, in which:

FIG. 1 is a somewhat schematic cross-sectional view of a prior art permanent magnet alternator/motor;

FIG. 2 is somewhat schematic partial cross-sectional view of an alternator/motor according to the present invention;

FIG. 3 is a schematic of a partial equivalent circuit of the alternator/motor of FIG. 2, illustrating its functional aspects;

FIG. 4 is similar to FIG. 2, but depicting another embodiment of the invention;

FIG. 5 is a block diagram schematically illustrating another aspect of the present invention;

FIG. 6 is a block diagram schematically illustrating another aspect of the present invention;

FIG. 7 depicts another embodiment of the invention;

FIG. 8 is a cross-sectional view of the embodiment of FIG. 2, taken along the line 8-8 in FIG. 2;

FIG. 9 is view similar to FIG. 8 of another embodiment of the invention;

FIG. 10 is view similar to FIG. 8 of another embodiment of the invention;

FIG. 11 is view similar to FIG. 8 of another embodiment of the invention; and

FIG. 12 is view similar to FIG. 8 of another embodiment of the invention.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 2, a portion of a permanent magnet (PM) electric machine according to the present invention is depicted in at **10**. For ease of illustration and description, FIG. 2 shows a linear arrangement of the electric machine **10**, however it is to be understood that the machine is generally preferred to have a circular architecture, with an inside or outside rotor. It will also be understood by the skilled reader that FIG. 2 and the accompanying description are schematic in nature, and that many routine details of the design have been omitted for clarity. The machine **10** may be configured as an alternator to generate electrical power, or motor to convert electrical power into mechanical torque, or both. The description below is directed to an electric machine operable as both an alternator and motor.

Alternator/motor **10** has a rotor **12** with permanent magnets **14** which is mounted for rotation relative to a stator **20**. Stator **20** has at least one power winding **22** and preferably at least one control winding **24**, and this embodiment stator **20** has a 3-phase design with three electromagnetically-independent power windings **22** (the phases are denoted by the circled numerals **1**, **2**, **3**, respectively) and, correspondingly, three

independent control windings **24**. The power and control windings are separated in this embodiment by a winding air gap **26** and disposed in radial slots **28** between a plurality of adjacent teeth **30**. (For ease of illustration in FIG. 2, the adjacent elements of control winding **24** are shown unconnected. For ease of description, the adjacent slots **28** are indicated as A, B, C, D etc.) Power winding **22** and control winding **24** are electrically isolated from one another. A back iron **32**, or control flux bus as it is described in this application, extends between slots **28**. A rotor air gap **34** separates rotor **12** and stator **20** in a typical fashion. A core or "bridge" portion or "power flux bus" **36** portion of stator also extends between adjacent pairs of teeth **30** between adjacent portions of power winding **22**.

The materials for PM machine **10** may be any deemed suitable by the designer. Materials preferred by the inventor are: samarium cobalt permanent magnets, copper power and control windings, a suitable saturable electromagnetic material for the stator teeth such as electrical silicon steels commonly used in the construction of magnetic machines, power and control flux busses. The stator teeth, power and control flux busses may be integral or non-integral with one another, as desired. The designer will select the rotor and stator dimensions and materials based at least in part on the desired properties of the magnetic circuits (described below) in the machine to yield the desired machine performance, etc. The control flux bus **32** is magnetically saturable, as will be described below.

Power winding **22** in this embodiment consists of a single conductor which enters slot **28** on a first side of power flux bus **36**, crosses power flux bus **36** at the other end and exits slot **28** on the second or other side of power flux bus **36** (i.e. opposite to the first side, or side of entry) and proceeds to a next slot **28** of the same phase, where the power winding **22** preferably enters this next slot from the second side of power flux bus **36** instead of the first side, as described above. The winding of power winding **22** is preferably similar to that described in the applicants U.S. Pat. No. 6,965,183.

Meanwhile, control winding **24** is wrapped around the control flux bus, in this embodiment preferably multiple times, such as 25 times, for reasons described below. The direction of winding between adjacent appropriate slots (i.e. appropriate to maintain phase correspondence with the power winding) is preferably the same from slot to slot, and thus alternately opposite relative to the power winding **22** and in equal numbers of slots, so that a net-zero voltage is induced in the control winding, as will also be described further below. Control winding **24** is connected to a current source and control system **50** (see FIG. 3), which in this example includes a variable current DC source and an appropriate solid state control system preferably having functionality as described further below. The current provided by such source is preferably sufficient to saturate control bus **32**, as will be described. Note that the control winding **24** does not necessarily need to be segregated into phases along with the power windings, but rather may simply proceed adjacently from slot to slot (e.g. slots A, B, C, D, etc.). Alternately, though not segregated into phase correspondence with power windings **22**, it may be desirable to provide multiple control windings, for example, to reduce inductance and thereby improve response time in certain situations. Preferably, several control windings **24** are provided in a series-parallel arrangement, meaning the control windings **24** of several slots are connected in series, and several such windings are then connected in parallel to provide the complete control winding assembly for the machine. Although it is preferred to alternate winding direction of the power windings, and not alternate direction of

the control windings as mentioned the power and control windings are preferably wound in relative opposite directions and in equal slot numbers to ensure a substantially net-zero voltage is induced in each control winding **24** as a result of current flow in the power windings **22**, so that the function described below is achieved.

Referring to FIG. 3, alternator/motor **10** as just described can also be represented schematically by an equivalent circuit **10'** having a plurality of alternating current sources **12'** (i.e. each, equivalent to the moving magnetic rotor system in conjunction with the portion of a power winding **22** located in slot portions **28a**) connected to a plurality of power inductors **22'** (i.e. equivalent to the portion of the primary winding **22** located in the slot portion **28b**), the current sources **12'** and power inductors **22'** arranged alternately in series. Associated with power inductors **22'** are a plurality of control inductors **24'** (i.e. equivalent to control winding **24**) having saturable cores **32'** (equivalent to the saturable control flux bus **32**). Control inductors **24'** are connected to a variable DC current source and control system in this example, represented by **50**, as will be described further below. Therefore, one can see that primary winding **22**, control winding **24** and control flux bus **32** co-operate in the present invention to provide an saturable core inductor on-board the stator **12**. Saturable core inductors are known to be useful in the regulation of AC power, and in one aspect the present invention provides an integrated approach to implementing a regulation scheme of this generic type, as will be further described.

Referring again to FIG. 2, in use, in an alternator mode rotor **12** is moved relative to stator **20**, and the interaction of magnets **14** and power windings **22** creates a primary magnetic flux within PM machine **10** along a primary magnetic flux path or magnetic circuit **60**. The primary flux induces a voltage in the power winding, which when an electrical load is connected results in an induced current, and the induced current causes a secondary magnetic flux to circulate an adjacent secondary magnetic flux path or magnetic circuit **62**. The secondary magnetic circuit **62** is remote from, and for the most part isolated from the rotor and primary magnetic circuit **60**. (it is to be understood that this description applies only to phase "1" of the described embodiment, and that similar interactions, etc. occur in respect of the other phases) The skilled reader will appreciate in light of this disclosure that it may be desirable in many situations to include a regulation apparatus to maintain a minimum current in the power winding during no-load conditions.

Primary magnetic circuit **60** includes rotor **12**, rotor air gap **34**, power flux bus **36** and the portion of stator teeth **30** between rotor **12** and power flux bus **36**. Primary magnetic circuit encircles a portion of power winding **22** and, in use as an alternator causes a current flow in power winding **22**. Secondary magnetic circuit **62** includes power flux bus **36**, control bus **32** and the portion of stator teeth **30** between control bus **32** and power flux bus **36**. Secondary magnetic circuit encircles the portions of the power winding **22** and control winding **24** in slot **28b**. Power flux bus **36** divides slot **28** into two slot portions or openings **28a** and **28b**, with one opening **28a** for the power winding only, and another opening **28b** for the power and control windings. The primary magnetic circuit encircles an opening **28a** while the secondary magnetic circuit encircles an opening **28b**. Opening **28a** is preferably radially closer to the rotor than opening **28b**. Power flux bus **36** is common to both the primary and secondary magnetic circuit paths in this embodiment, however as discussed further below the power flux bus may be separate from the upper portion of the secondary flux path along the

5

direction of flux lines so that the secondary magnetic circuit does not share any common stator portions with the primary magnetic circuit.

A tertiary magnetic circuit 64 preferably circulates around control bus 32, as partially indicated in FIG. 2 (i.e. only a portion of the tertiary circuit is shown as in this embodiment the tertiary circuit circulates the entire stator). The control flux bus 32 is preferably common to both the secondary and tertiary magnetic circuit paths. As mentioned, at least a portion of control flux bus 32 is selectively magnetically saturable, as described further below.

When operated as an alternator, the present invention permits the output of the power winding(s) 22 to be controlled through a manipulation of current supplied to control winding (s) 24, as will now be described.

As explained above, the equivalent power inductor 22' is formed by the portion of the power winding 22 in slot 28b and the secondary magnetic circuit 62, as schematically represented by the equivalent circuit of FIG. 3. The control winding 24 shares the secondary magnetic circuit, however since it is preferably wound in the same direction as the power winding 22 in each slot, as mentioned above, the effect achieved is similar to that provided by alternately reversed saturable inductors, and there is preferably substantially no net voltage generated within the control winding 24 by flux in the secondary magnetic circuit.

The application of a DC current from the source 50 to the control winding 24 results in a DC flux circulating circuit 64 in the control flux bus 32. At the instant in time depicted in FIG. 2. It can be seen that the DC flux in tertiary magnetic circuit 64 in the control flux bus 32 is in the same direction in slot A as the AC flux in secondary magnetic circuit 62, but in slot D the direction of the DC flux in tertiary magnetic circuit 64 in the control flux bus 32 is opposite to the AC flux in secondary magnetic circuit 62. As the DC current is increased in the control winding 24, the flux density in the control bus 32 is increased such that the saturation flux density is eventually reached. It will be understood that saturation is reached first in the regions in the control bus where the AC flux and the DC flux are in the same direction, and that at higher DC control currents both regions of the control bus become saturated regardless of flux direction. Once saturation occurs, the AC flux in the secondary magnetic circuit due to the current in the power winding, is very significantly reduced.

As mentioned, the control winding pattern relative to the power winding preferably results in a near net zero voltage induced in the control winding, which simplifies control. Also, since the DC control current through both control flux buses 32 produces magnetic fluxes in different directions relative to the power winding 22, one bus 32 will saturate more in one half-cycle of the AC power while the other bus 32 will saturate more in other, thus tending to equalize the control action through each half-cycle.

Once saturated, magnetic materials substantially lose their ability to conduct magnetic flux, and as such appear to be non-magnetic to both AC magnetic forces (H_{AC}) and further changes in DC magnetic influence (H_{DC}). The net effect of this saturated condition in the control bus 32 is thus to virtually eliminate the inductance (or impedance) due to the secondary magnetic circuit, which thereby significantly reduces inductance (or impedance) of the machine.

Furthermore, as the current flow in the power winding 22 increases, for example due to an increase in the external load or an increase in the generated output voltage due to an increase in operating speed: the portion of the control flux bus 32 in which the flux directions are instantaneously opposing will become less saturated, which causes a proportional

6

increase in the inductance. This effect tends to cause the output current to remain somewhat constant. Thus the present invention causes the power output current of the alternator to become a function of the control current. The maximum inductance of the equivalent power inductor 22' formed by the secondary magnetic circuit is related to the physical dimensions and materials of the portions carrying the secondary magnetic circuit. The power winding current limit is related to the current in the control winding by:

$$IP * Np + K = IC * Nc$$

where: Np and Nc are the number of turns in the power and control windings, respectively, IP and IC are the currents in the power and control windings, respectively, and K is a constant which is inversely proportional to the maximum inductance of the power winding and other machine design features.

This permits manipulation of the output of power winding 22, and thus control winding 24 may be used as a source of control of PM machine 10. Means for controlling the operation of PM machine are thus available within the machine itself, as the "control" current may be generated by the PM machine 10 power windings, typically in conjunction with rectifiers. In some instances therefore, no external source of control current may be required in conjunction with an electronic current control, although arranging the control winding in series with the rectified output current may also be used to control current to some extent. The novel architecture of the present invention therefore lends itself to many novel possibilities for control systems for the machine, a few examples of which will now be described.

For example, the output (i.e. from a power winding 22) of alternator 10 may be controlled by connecting control winding 24 to a power supply 50, and a current applied to the control winding preferably sufficient to fully saturate the control flux bus 32, such saturation being caused by magnetic flux flowing along tertiary path 64 induced by current passing through control winding 24, which is wrapped around control flux bus 32 in this embodiment. When saturation occurs, flux around the secondary magnetic circuit 62 is effectively eliminated, and the magnetic relationship between the power windings and the secondary magnetic circuit is such that inductance in the power winding is virtually eliminated. Thus, more current is permitted to flow in the power winding. Therefore, the current level provided by controlled current source supply 50 can be continuously varied, as required to regulate the output current of the power windings (and thus, ultimately, output voltage) over a range of rotor speeds and electrical loads. In order to effect constant output voltage control, for example, a feedback control circuit is used by the control system of source 50 to compare the alternator output voltage (i.e. the output of power winding 22) to a fixed reference (e.g. representative of a desired output voltage level(s)), and control can be configured such that, when the alternator output voltage is less than a desired reference level, a command is provided to increase the control current to increase saturation level and therefore output current, and thus voltage. Likewise, when the alternator output voltage is above a desired reference value (which may or may not be the same reference value mentioned above), a command is similarly provided to reduce the control current to decrease saturation level and therefore output current, which ultimately permits output voltage control as well. In this way, the output voltage of the alternator can be regulated.

In another control method, if no current is supplied to control winding 24, the output of power winding 22 is

reduced and may be by design, limited by the construction of the machine such that the machine's impedance is sufficient to limit short circuit currents to that which the machine may comfortably handle without damage (i.e. the short circuit current is low enough that it would not, for example, pose a danger such a machine overheating, etc.). In this respect, the present invention operates in a similar manner reminiscent of the "fusible-secondary" embodiment of the applicant's U.S. Pat. No. 6,965,183.

Many other control schemes are also possible, including the modulation of the control current (i.e. the current in control windings **24**) control with a rapidly varying current so as to cause cyclic amplitude modulation of the alternator output, thereby resulting in the generation of new output frequencies (or side bands) which are different from the raw frequency of the machine (i.e. speed times pole pair frequency of the alternator).

Magnetic flux preferably circulates the tertiary magnetic circuit **64** in the same direction around the control flux bus **32**. As mentioned above, although the control winding is provided in the slots corresponding to a particular phase of the three-phase machine described, the power windings are wound in the opposite direction in each slot which is due to the opposite polar arrangement of the magnets **14** associated with each adjacent slot of the phase. To ensure that a uniform direction for the tertiary magnetic circuit **64** is provided, as mentioned the control windings are preferably wound in the same direction in all slots. Also as mentioned, a net-zero voltage is induced in control windings **24**, which is desirable because a relatively low DC potential is required to provide DC control currents, thus no special considerations are required to remove a significant AC potential on the control winding.

The present invention also advantageously permits load to be shared between a plurality of alternators/generators. The control winding controls the output current of the machine. Thus, referring to FIG. 5, if several alternators **10** are connected to simple rectifiers **60**, the output of the rectifiers can be directly connected together such to feed a common load circuit. Each alternator's contribution to the load current is set by control of the DC current (in this example) provided to each alternator from controlled source **50'**. In this way, if a single alternator should fail or be shut down, a control system integrated in **50** can sense this and provide a seamless sharing of load by increasing the current contribution of one or more of the remaining alternators to preferably make up the deficit from the failed or shut down alternator.

It is also possible with this invention to connect properly phased alternators **10** directly together such that the AC output of a plurality of alternators **10** having matched phases (e.g. phase "1", as described above) can be parallelly connected, as shown in FIG. 6. Current sharing control is provided through control system **50"** which also adjusts the control current in each alternator as described above, This can lead to certain advantages of mechanical arrangements when the maximum diameter or shaft length of a single machine must be maintained below a particular value for, say, rotor dynamic or other reasons. In this way, two smaller machines **10** on a single shaft **70** for example, can provided a sufficiently large power output to a larger shared common load circuit.

In both of the above examples, this permits a much simpler means by which power may be shared, and does not require the complicated control systems of the prior art. This feature may be used advantageously, as well, in a "dual channel" electric machine, as described in applicants U.S. Pat. No. 6,965,183. Referring again to FIGS. 5 and 6, for example both

machines **10** can be integrated in to a single rotor-stator assembly in accordance with the teachings of the mentioned patent. That is, distinct winding sets, corresponding to each functional "machine" are disposed within distinct, non-overlapping sectors of a common stator, and connected to independent electronics (e.g. power conditioning electronics in the case of machine **10** used as an alternator, or motor drive electronics in the case of a machine **10** used as a motor). Distinctly controllable machine "channels" according to the present teachings are thus provided within a single stator structure.

In another embodiment, as discussed above, primary flux bus **36** may be provided with a low Curie point materials in accordance with the applicant's co-pending application incorporated above., so as to provide thermal protection in the event that a fault causes normal operating temperatures to be exceeded.

Control schemes such as those disclosed above may be employed individually or may be combined as desired to permit several control features to exist contemporaneously within the PM machine. As prior art fixed-geometry PM machines typically are not controllable in any way other than by the speed at which they are operated, this controllability feature of the present invention is of significant value to the PM machine designer, particularly in those applications where the rotational speed of the machine cannot itself be used to control machine output. The present invention also offers a robust and reliable design suitable for aerospace applications. The power-sharing opportunities offered by the present invention also cannot be ignored.

In another embodiment, shown in FIG. 4, the control winding **24** is provided in a separate closed slot **28c** adjacent to the closed slot portion **28b**. The secondary magnetic circuit **62** and tertiary magnetic circuit **64** share the control flux bus **32**. Reference numerals in FIG. 4 use the same numerals to denote elements similar to those of FIG. 2 and described above. The same is also true of the embodiments of FIGS. 7-12, as will now be discussed, The skilled reader will appreciate that as the elements of the various embodiments are discussed, only those needed to enable understanding by the skilled reader will be discussed, and that those elements having similar function to the embodiments described above need not be discussed further.

In the embodiment of FIG. 7, the control winding **24** is located within slots **28b** provided in a separate stator **21**, which is preferably but not necessarily positioned concentrically with stator **20**. While control winding **24** is depicted schematically as a monolithic annulus in FIG. 7, it is preferably a multiple-turns wound conductor, as described above, connected to a suitable power source (not shown in this Figure), Power winding **20** is positioned within slots **28a** and **28b**, and thus extends between stator **20** and stator **21**. Power winding end turns **23** join the conductors of adjacent slots (the embodiment of FIG. 7 has three sets of power windings **22**—only one of which is shown—with one winding set corresponding to each phase of a three-phase system, and hence three sets of end turns **23** are depicted in FIG. 7, the innermost set corresponding to the power winding **22** depicted, while the others correspond to adjacent phases which are not depicted). Stator **21** provides control flux bus **32**, while power flux bus **36** is provided in two portions—portion **36a** in stator **20** and portion **36b** in stator **21**. Power flux bus portion **36a** forms part of primary magnetic circuit **60**, while power flux bus portion **36b** forms part of secondary magnetic circuit **62**. Control flux bus **32** provides a portion of secondary magnetic circuit **62** and tertiary magnetic circuit **64**, as before. Stator **21** is supported in any suitable manner, such as through integra-

tion with stator **20** (not shown), through supports (not shown) mounted to stator **20** or other suitable foundation, or simply through the intrinsic supported provided by power windings **22** themselves, preferably in conjunction with suitable means (not shown) to impede unwanted vibration, etc. For comparison purposes, FIG. **8** shows a view similar to FIG. **7** of the embodiment of FIG. **2**. The embodiment of FIG. **7**, relative to that of FIGS. **2** and **8**, permits independence of stator length and material between stators **20** and **21**, and permits flexibility in providing machine **10** within an available space envelope. As well, the configuration of power windings **22** is somewhat simpler, in that additional looping of power winding **22** is not present. As well, the control winding **24** may be placed outside the circumference of stator **20**, without interfering with the operation of rotor **12**. The stator **21** need not be physically adjacent stator **20** at all, but preferably is for reasons of compactness, efficiency, etc.

Referring now to FIGS. **9** to **11**, various embodiments are shown employing stators **20** and **21**. In FIG. **9**, the saturation apparatus includes a plurality of control windings **24**, one disposed on each side of power winding **22**, connected to suitable electrical source or sources, and which may be independently controlled if desired FIGS. **10** and **11** demonstrate a few examples of options for placing components, to demonstrate the flexibility provided to meet a pre-specified envelope for machine **10**. A myriad of other examples will be apparent to the skilled reader, as well. The stator **21** need not be aligned with nor adjacent stator **20**, nor have any resemblance whatsoever to the appearance of stator **20**.

In another embodiment, depicted schematically in FIG. **12**, rather than rely on an electromagnetic saturation control apparatus, including a control winding **24** and controlled current source **50**, for saturation control as described above, the control flux bus may be saturated instead with a saturation assembly comprising one or more suitable permanent magnets **80** brought into close proximity to the control flux bus **32** by an appropriate control and actuation system (not shown), which may be mechanical, electrical, electronic or otherwise, or combinations thereof. For example, permanent magnets **80** are mounted on a support **82**, which is controllably moveable, such as through rotation, reciprocation, vibration or other movement, so as to permit the magnets to periodically vary a saturation level of the control flux bus to appropriately control power winding **22** as described above. The frequency of saturation is adjusted through control of the speed and movement of the moving magnets **80**. This permanent magnetic saturation assembly eliminates the need for an electromagnetic assembly with control winding **24** and its associated circuitry.

The present invention may also be used for electric motor control purposes. For example, when used as a starter motor, the present invention may be used to vary the impedance of the motor and thereby control current transients experienced during motoring, the torque speed relationship can also be adjusted to some degree using the control winding, since the phase angle between the rotor mmf and the armature mmf are variable due to the variable inductance of the power winding. Similarly, other modes of control are possible for alternators/generators, as well. For example, as briefly mentioned above, varying or modulating the saturation level appropriately may be used to control the frequency of output alternating current in the power windings by variably shifting the generated frequency, as the alternator speed is varied, so as to provide a desired constant output frequency. This may be done using amplitude modulation techniques such that the alternator output frequency consists of two or more frequency components (i.e. sum and difference frequencies or sidebands). Appropriate filtering, subtraction or detection of one of the frequencies

will result in a new single output frequency which is related to the sum or difference between the alternator frequency and the control frequency. Active rectification of the envelope of a modulated alternator output could also be used to provide a new power frequency.

The above description is meant to be exemplary only, and one skilled in the art will recognize that changes may be made to the embodiments described without departure from the scope of the invention disclosed. For example, the number of phases in the motors could be varied and could be to any number. The motors may be single or multi-phase, single or multi-channel. The windings may have single or multiple turns per slot, the number of turns of a winding not necessarily has to be a whole number. The number of phase windings does not necessarily have to equal the number of control windings, and one or more windings may perhaps be present in a slot. The windings may be any conductor(s) (i.e. single conductor, more than one wire, insulated, laminated, Litz etc.) or may be superconductors. In multiphase machines, there may be delta or Y-connected windings in accordance with suitable techniques. There need not be an air gap between the power and control windings, as long as the windings are electrically isolated from one another. The rotor can be any electromagnetic configuration suitable (i.e. permanent magnet rotor not necessary), and may be provided in an outside or inside configuration, or any other suitable configuration. Other winding configurations are possible, and those described above need not be used at all, or throughout the apparatus. Also, the magnetic circuits described can be arranged in the stator (and/or rotor) in any suitable manner. Any suitable stator configuration may be used, and the stators depicted are exemplary only. The stator need not be slotted as shown, nor slotted at all. The arrangement of the primary, secondary and tertiary magnetic circuits, and the arrangement of phase winding saturation apparatus(es) in the machines may be any suitable arrangement. Likewise, the stator and rotor may also have any suitable configuration. Although DC is preferred in the control windings **24** of the machine, any suitable saturating arrangement may be used. Any suitable machine control arrangement may be employed. The present technique may also be employed with stand-alone motors if desired, and redundant systems are not required, but merely one apparatus arrangement which may benefit from the application of the above principles. Still other modifications which fall within the scope of the present invention will be apparent to those skilled in the art, in light of a review of this disclosure, and such modifications are intended to fall within the appended claims.

Still other modifications which fall within the scope of the present invention will be apparent to those skilled in the art, in light of a review of this disclosure, and such modifications are intended to fall within the equivalents accorded to the appended claims. In this application, it is to be understood that the term 'alternator' is used sometimes used generically to mean a device used for generating electricity, and is not always intended therefore to be limited to a device for generating an output alternating current.

What is claimed is:

1. A method of regulating operation of an electrical machine, the method involving a plurality of electric machines, each machine having a magnetic rotor, a stator and at least one stator winding, the winding associated with a primary magnetic circuit defined by the rotor and stator, the winding also associated with a secondary magnetic circuit defined in the stator, the secondary magnetic circuit remote from the first magnetic circuit and including a magnetically saturable portion, the method comprising the steps of:

11

operating each machine to provide at least one of generated output electrical power in the winding and motive power as a result of current supplied to the winding;
 controllably varying a saturation level of a portion of the secondary magnetic circuit to thereby control operation of each machine;
 monitoring the output of each machine for at least one criterion indicative of a fault condition existing in a deficient machine resulting in an associated power decrease;
 controllably varying a saturation level of at least one non-deficient machine to compensate for said power decrease.

2. The method of claim 1, wherein said associated power decrease is due to at least one of a failure and shut down of the deficient machine.

12

3. The method of claim 1, wherein in at least one of the machines, the stator comprises a first stator portion and a second stator portion, and wherein the magnetic rotor rotates adjacent the first stator portion and the saturation level is controlled adjacent the second stator portion.

4. The method of claim 3, wherein the first and second stator portions are disposed axially beside one another relative to a common axis of the stator portions.

5. The method of claim 3, wherein the stator portions are distinct components relative to one another.

6. The method of claim 1, wherein the step of controllably varying the saturation level includes providing electric power from a power source to an electromagnetic saturation assembly.

7. The method of claim 1, wherein the magnetic rotor of each machine includes at least one permanent magnet.

* * * * *