



(12) **United States Patent**
Dooley

(10) **Patent No.:** **US 7,568,896 B2**
(45) **Date of Patent:** ***Aug. 4, 2009**

(54) **PUMP AND METHOD**

(75) Inventor: **Kevin Allan Dooley**, Mississauga (CA)

(73) Assignee: **Pratt & Whitney Canada Corp.**,
Longueuil, Quebec (CA)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **11/564,937**

(22) Filed: **Nov. 30, 2006**

(65) **Prior Publication Data**

US 2007/0092382 A1 Apr. 26, 2007

Related U.S. Application Data

(63) Continuation of application No. 11/017,797, filed on Dec. 22, 2004, now Pat. No. 7,226,277.

(51) **Int. Cl.**

F04B 35/04 (2006.01)

F04D 3/02 (2006.01)

(52) **U.S. Cl.** 417/356; 417/355; 417/423.7;
417/423.12; 415/71; 415/72; 415/110; 415/111

(58) **Field of Classification Search** 417/356,
417/355; 415/72, 75, 110, 11; 416/176,
416/177

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,225,338 A	12/1940	Giess
2,500,400 A	3/1950	Cogswell
2,953,993 A	9/1960	Strickland et al.
3,220,350 A	11/1965	White
3,288,073 A	11/1966	Pezzillo
3,373,690 A	3/1968	Unger

3,413,925 A	12/1968	Campolong
3,697,190 A	10/1972	Haentjens
3,972,653 A	8/1976	Travis et al.
3,986,551 A	10/1976	Kilpatrick
4,382,199 A *	5/1983	Isaacson 310/87
4,408,966 A	10/1983	Maruyama
4,415,308 A	11/1983	Maruyama et al.
4,470,752 A	9/1984	Teruo et al.
4,957,504 A *	9/1990	Chardack 623/3.14
5,049,134 A	9/1991	Golding et al.
5,088,899 A	2/1992	Blecker et al.
5,505,594 A	4/1996	Sheehan
5,692,882 A	12/1997	Bozeman, Jr. et al.
6,068,454 A	5/2000	Gaston et al.
6,368,075 B1 *	4/2002	Fremery 417/365

(Continued)

OTHER PUBLICATIONS

International Search Report—Issued by the Canadian Intellectual Property Office as the International Searching Authority on Feb. 23, 2006, for the PCT International Application corresponding to and claiming priority from the U.S. Appl. No. 11/017,797.

Primary Examiner—Charles G Freay



Assistant Examiner—Patrick Hamo

(74) *Attorney, Agent, or Firm*—Ogilvy Renualt LLP

(57) **ABSTRACT**

A pump for moving a liquid including a stator and a rotor which rotates to move at least one helical pumping member. The rotor in rotation is radially supported relative to the stator only by a layer of liquid maintained between the rotor and stator by rotor rotation.

6 Claims, 6 Drawing Sheets

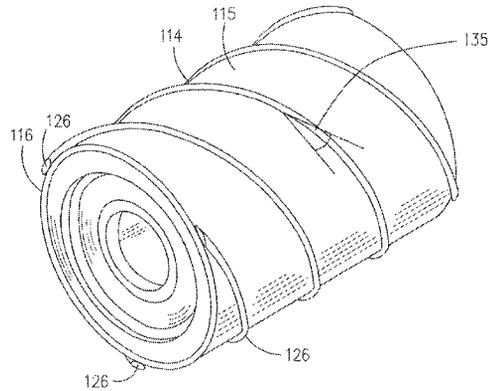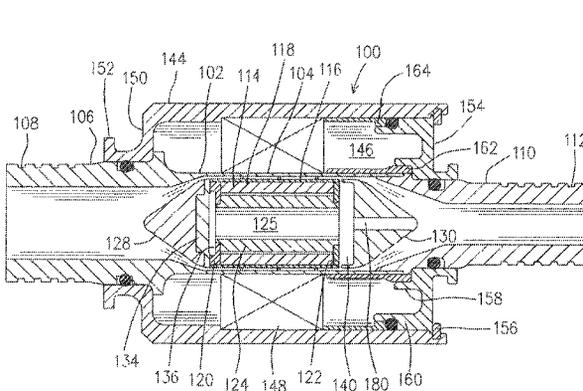

US 7,568,896 B2

Page 2

U.S. PATENT DOCUMENTS

6,450,785 B1 9/2002 Delby et al.
6,692,225 B2 2/2004 Lin

7,226,277 B2* 6/2007 Dooley 417/356
2004/0241019 A1 12/2004 Goldowsky

* cited by examiner

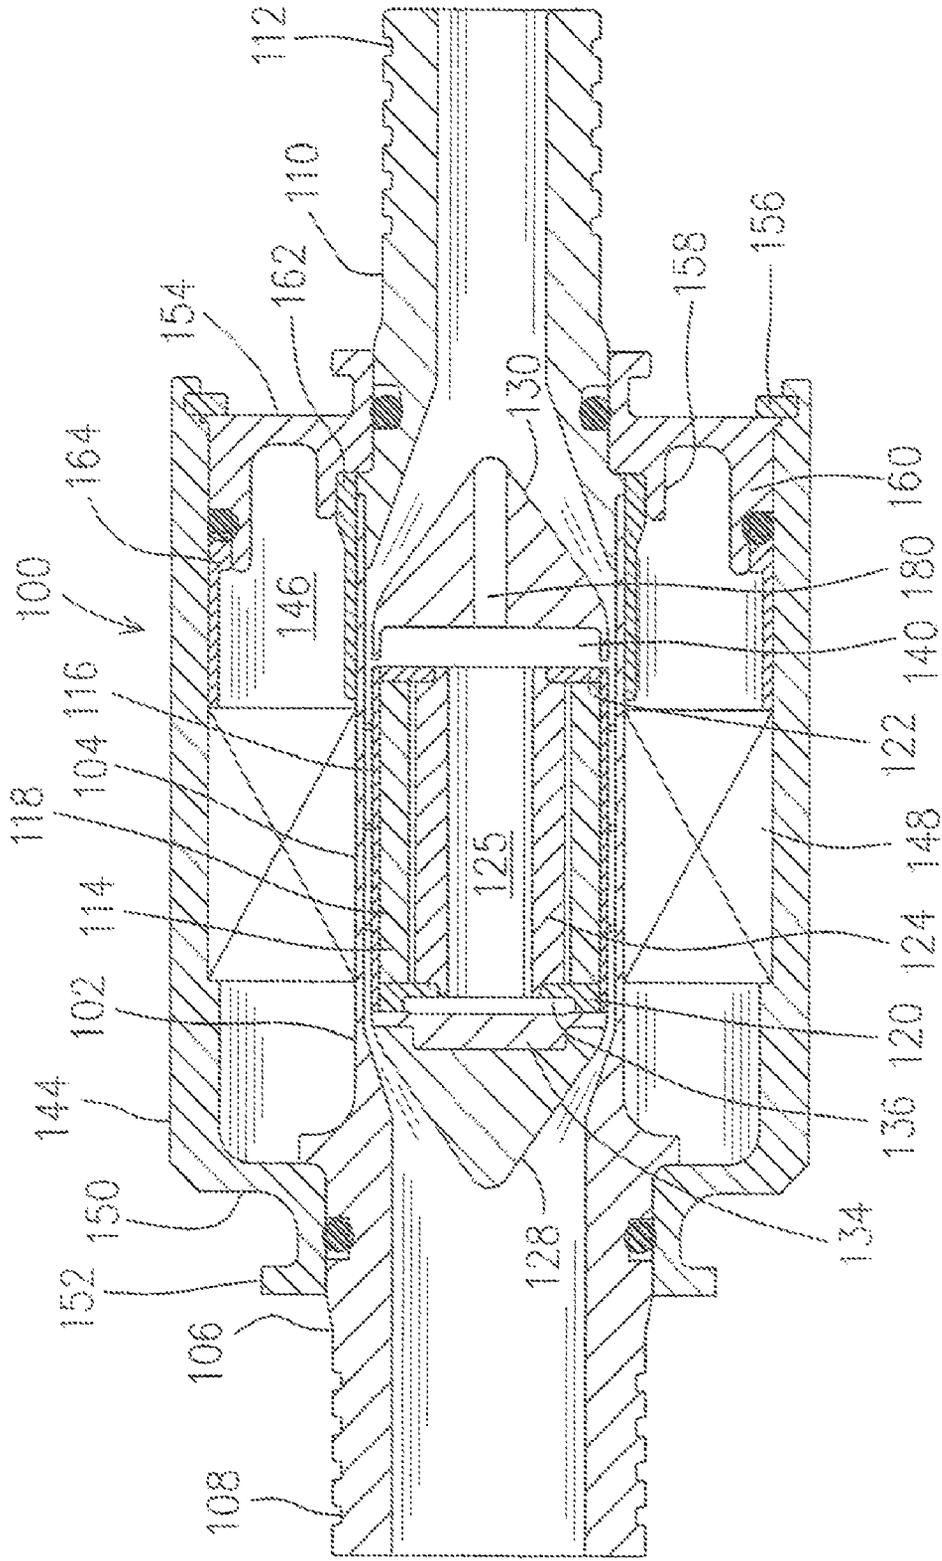


FIG. 1

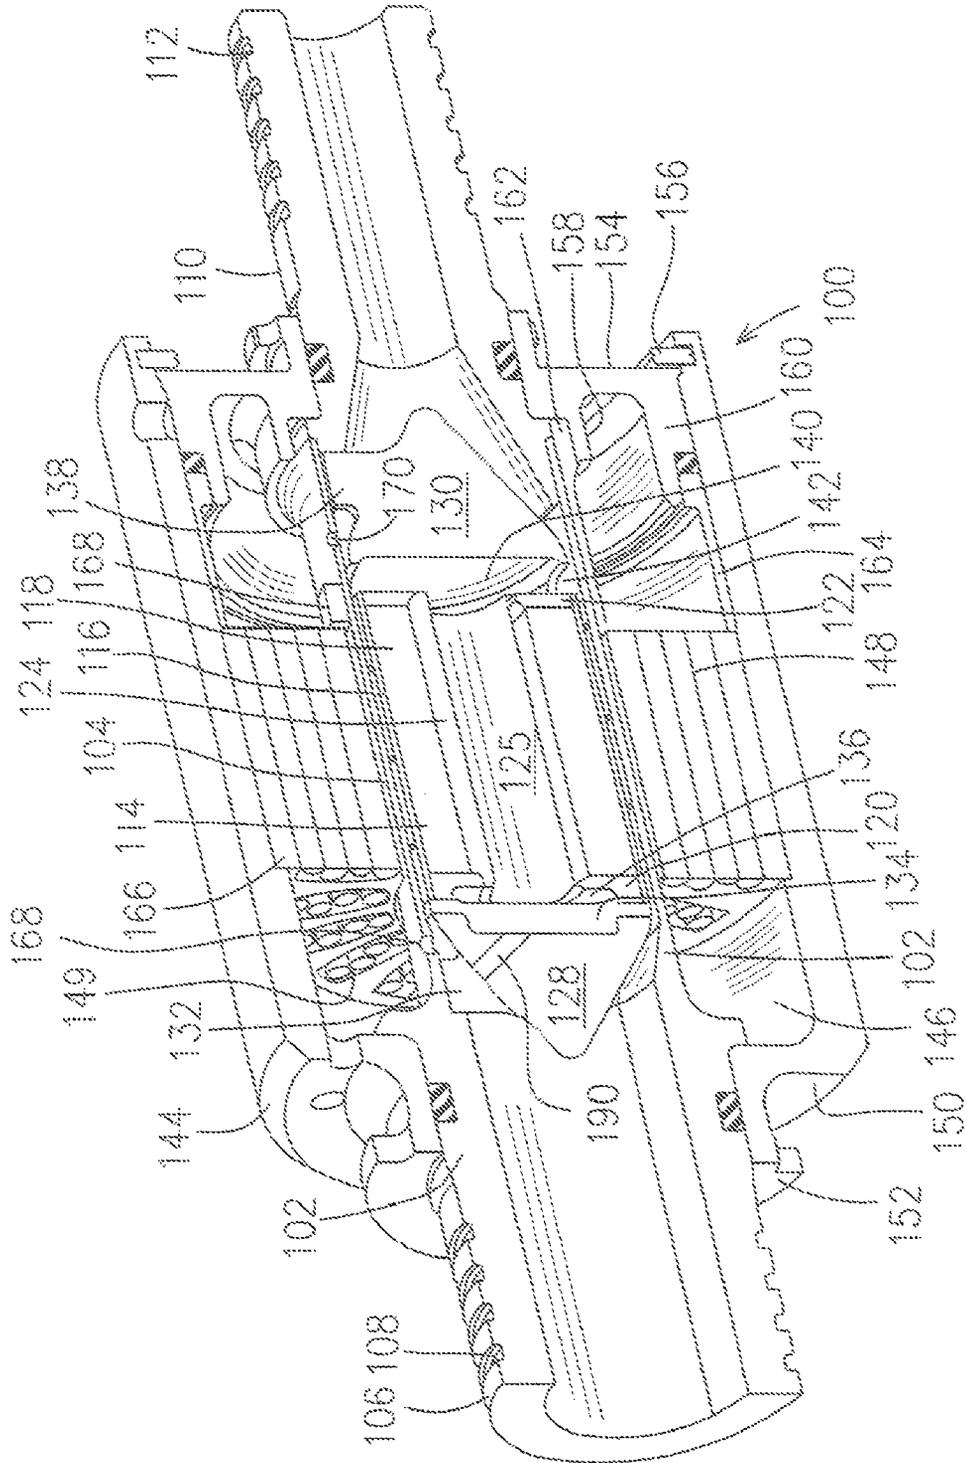


FIG. 2

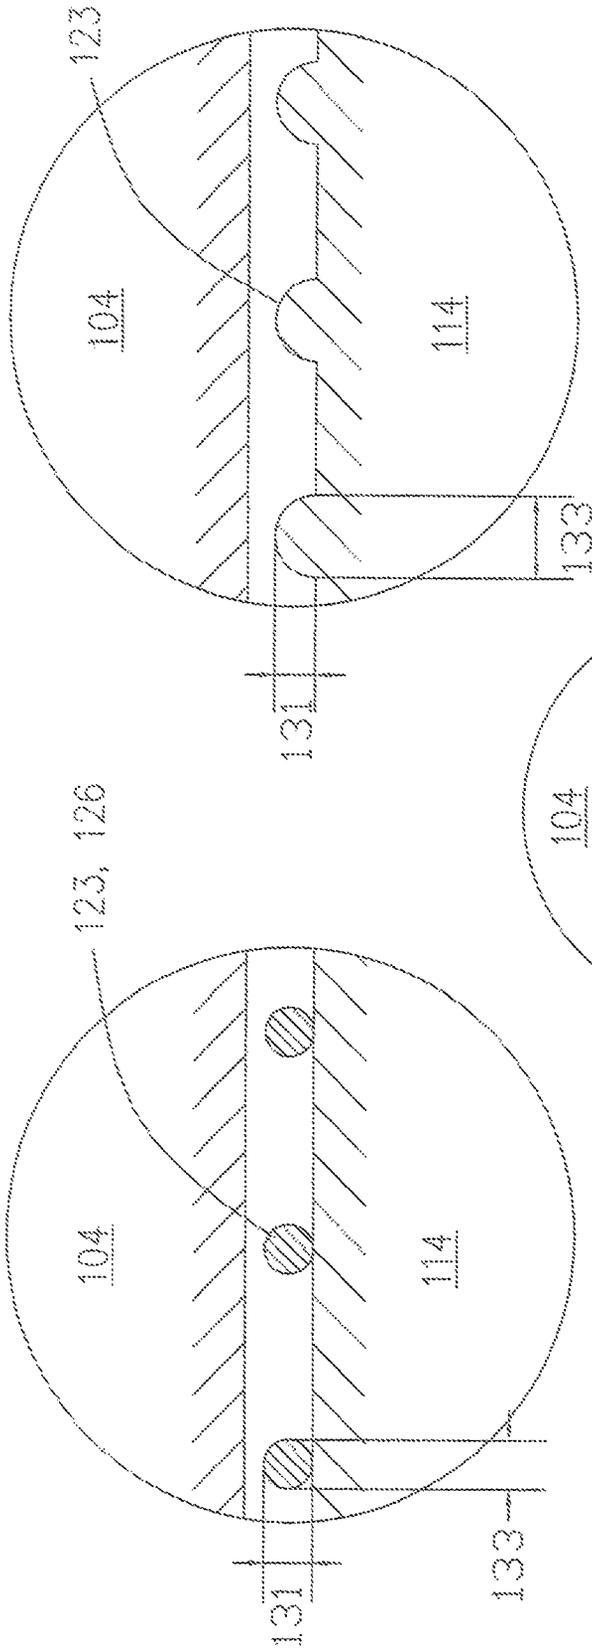


FIG. 3A

FIG. 3B

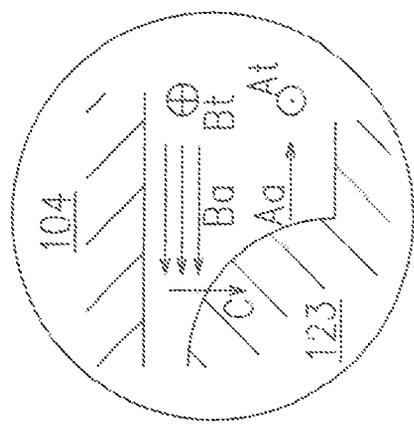


FIG. 3C

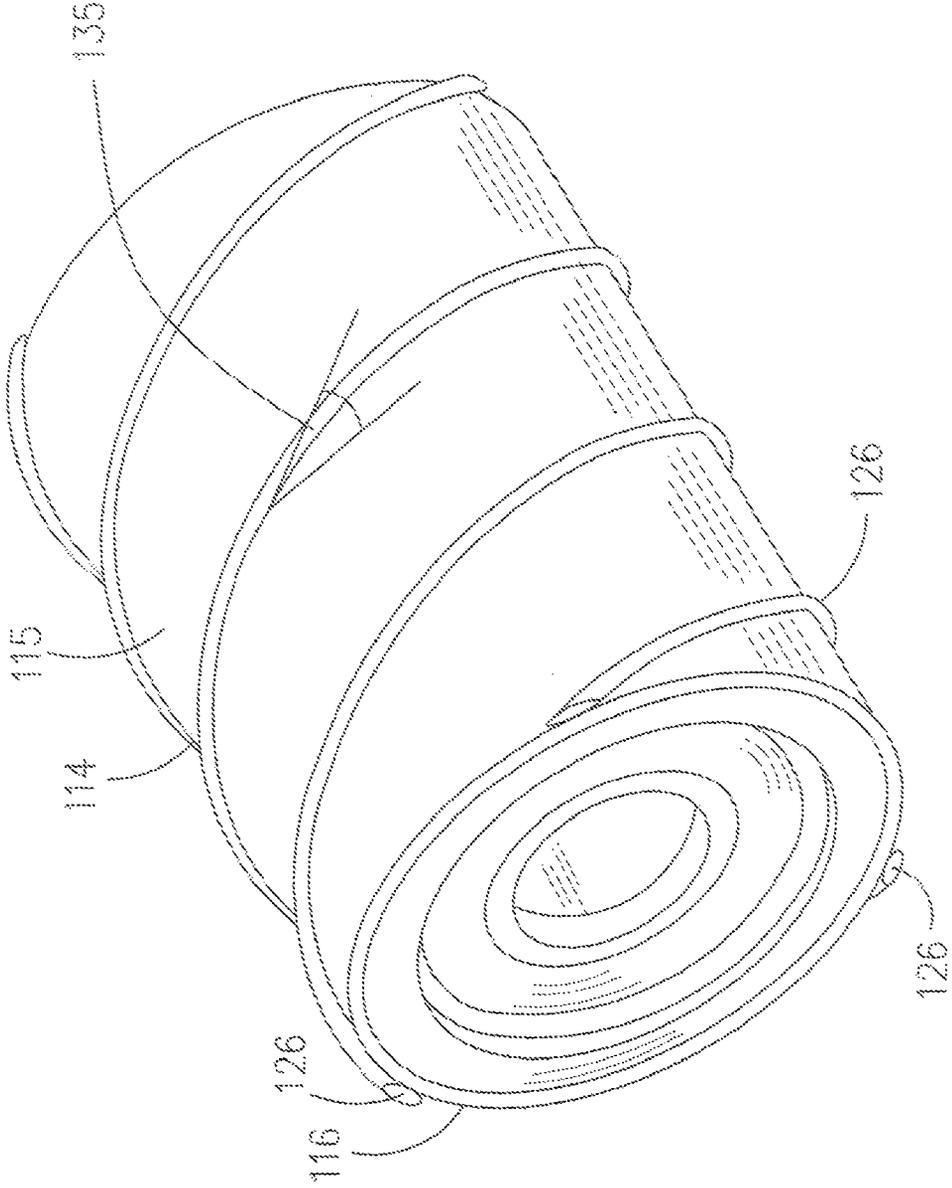


FIG. 4

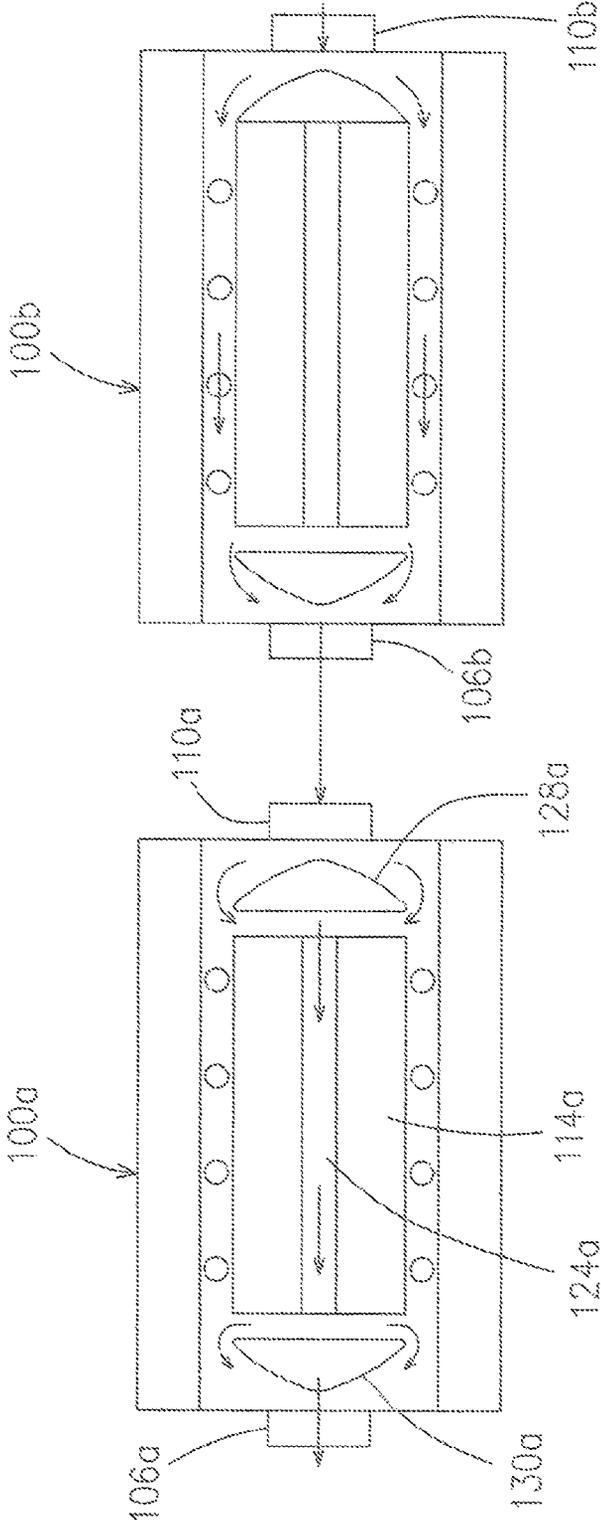


FIG. 5

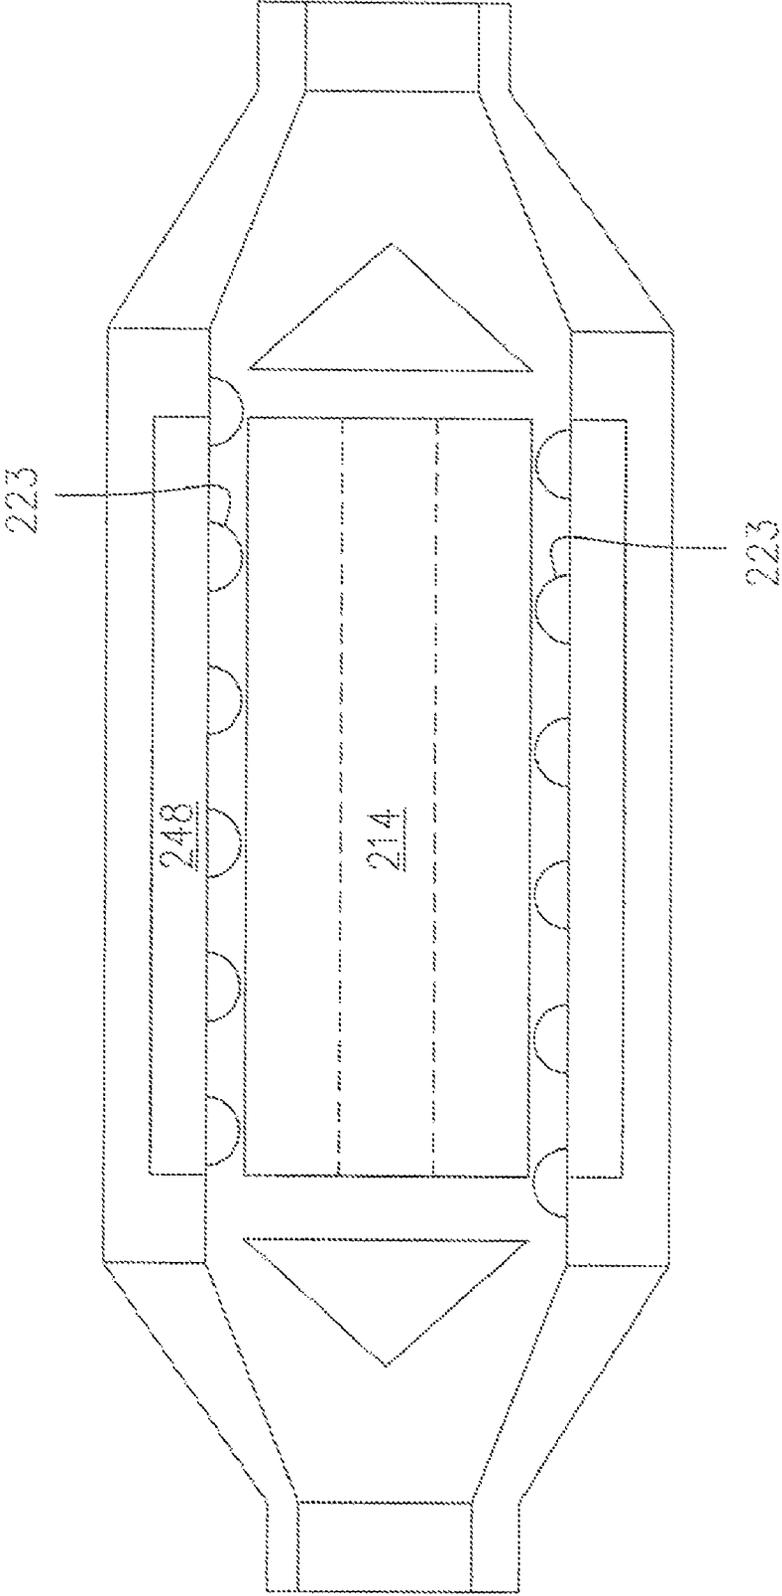


FIG. 6

1

PUMP AND METHOD**CROSS-REFERENCE TO RELATED APPLICATIONS**

This is a Continuation of Applicant's U.S. patent application Ser. No. 11/017,797, filed on Dec. 22, 2004 now U.S. Pat. No. 7,226,277.

FIELD OF THE INVENTION

The present invention relates to a pump used for pumping a liquid.

BACKGROUND OF THE INVENTION

Electrically driven helix-type pumps are known. Permanent magnet pumps are also known. For example, a centrifugal blood pump is disclosed in U.S. Pat. No. 5,049,134 and an axial blood pump is disclosed in U.S. Pat. No. 5,692,882. In general, these and other helix pumps rely on friction or fluid dynamic lift to move fluid axially through the pump. That is, although the helix rotates, the liquid is rotationally relatively stationary as it moves axially along the length of the pump. While perhaps suited for pumping blood and other low speed and low pressure application, these devices are unsuitable for other environments, particularly where high speed and high pressures are desired. Room for improvement is therefore available.

SUMMARY OF THE INVENTION

One object of the present invention is to provide an improved pump.

In accordance with one aspect of the present invention, there is provided a pump having at least one inlet and one outlet for use in a liquid circulation system, the liquid having a dynamic viscosity, the circulation system in use having a back pressure at the pump outlet, the pump comprising a rotary rotor and a stator providing first and second spaced-apart surfaces defining a generally annular passage therebetween, the passage having a central axis and a clearance height, the clearance height being a radial distance from the first surface to the second surface, the rotor in use adapted to rotate at a rotor speed, at least one thread mounted to the first surface and extending helically around the central axis at a thread angle relative to the central axis, the thread having a height above the first surface and a thread width, the thread height less than the clearance height, the thread width together with a thread length providing a thread surface area opposing the second surface, wherein the rotor, in use, rotates at a rotor speed relative to the stator which results in a viscous drag force opposing rotor rotation, said drag force caused by shearing in the liquid between the thread and first surface and the second surface, the viscous drag force having a corresponding viscous drag pressure, wherein the thread height, thread surface area and thread angle are adapted through their sizes and configurations to provide a viscous drag pressure substantially equal to the back pressure, and wherein the clearance height is sized to provide for a non-turbulent liquid flow between the first and second surfaces.

In another aspect, the present invention provides a method of sizing a pumping system, the system including at least one pump and a circulation network for circulating a liquid having a dynamic viscosity, the circulation system having a back pressure at an outlet of the pump, the pump having a rotary rotor and a stator providing first and second spaced-apart

2

surfaces defining a generally annular passage therebetween, the passage having a central axis and a clearance height, the clearance height being a radial distance from the first surface to the second surface, the rotor in use adapted to rotate at a rotor speed, at least one thread mounted to the first surface and extending helically around the central axis at a thread angle relative to the central axis, the thread having a height above the first surface and a thread width, the method comprising the steps of determining the back pressure for a desired system configuration and a given liquid, dimensioning pump parameters so as to provide a non-turbulent flow in the passage during pump operation, selecting thread dimensions to provide a drag pressure in response to rotor rotation during pump operation, and adjusting at least one of back pressure and a thread dimension to substantially equalize drag pressure and back pressure for a desired rotor speed during pump operation.

In another aspect, the present invention provides a pump for a liquid, the pump comprising a stator including at least one electric winding adapted, in use, to generate a rotating electromagnetic field, a rotor mounted adjacent the stator for rotation in response to the rotating electromagnetic field, the rotor and stator providing first and second spaced-apart surfaces defining a pumping passage therebetween; and at least one helical thread disposed between the first and second surfaces and mounted to one of said surfaces, the thread having a rounded surface facing the other of said surfaces, wherein the rotor is sized relative to a selected working liquid such that, in use, the rotating rotor is radially supported relative to the stator substantially only by a layer of the liquid maintained between the rotor and stator by rotor rotation. Preferably rotor position is radially maintained substantially by a layer of the liquid between the rounded surface and the other of said surfaces which it faces.

In another aspect, the present invention provides a pump comprising a housing and a rotor rotatable relative to the housing, the rotor and housing defining at least a first flow path for a pump fluid, the rotor being axially slidable relative to the housing between a first position and a second position, the first position corresponding to a rotor axial position during normal pump operation, the second position corresponding to a rotor axial position during a pump inoperative condition, the rotor in the second position providing a second flow path for the fluid, the second flow path causing a reduced fluid pressure drop relative to the first flow path when the pump is in the inoperative condition. Preferably the second flow path is at least partially provided through the rotor. Preferably the first flow path is provided around the rotor.

In another aspect, the present invention provides a method of making a pump, comprising the steps of providing a housing, rotor, and at least one wire, winding the wire helically onto the rotor to provide a pumping member on the rotor, and fixing the wire to the rotor.

In another aspect, the present invention provides a pump for pumping a liquid, the pump comprising a rotor, and a stator, the stator including at least one electrical winding at least one cooling passage, and a working conduit extending from a pump inlet to a pump outlet, working conduit in liquid communication with the cooling passage at at least a cooling passage inlet, such that in use a portion of the pumped liquid circulates through the cooling passage.

In another aspect, the present invention provides a pump comprising a rotor and working passage through which fluid is pumped and at least one feedback passage, the feedback passage providing fluid communication between a high pressure region of the pump to an inlet region of the pump. Preferably the feedback passage is provided through the rotor.

In another aspect, the present invention provides a pump comprising a rotor working passage through which liquid is pumped and at least one feedback passage, the rotor being disposed in the working passage and axially slidable relative thereto, the working passage including a thrust surface against which the rotor is thrust during pump operation, the feedback passage providing liquid communication between a high pressure region of the working passage and the thrust surface such that, in use, a portion of the pressurized liquid is delivered to form a layer of liquid between the rotor and thrust surface.

In another aspect, the present invention provides an anti-icing system comprising a pump and a circulation network, wherein the pump is configured to generate heat in operation as a result of viscous shear in the pump liquid, the heat being sufficient to provide a pre-selected anti-icing heat load to the liquid.

Other advantages and features of the present invention will be disclosed with reference to the description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Reference will be now made to the accompanying drawings in which:

FIG. 1 is a cross-sectional view of a helix pump incorporating one embodiment of the present invention;

FIG. 2 is an isometric view of the embodiment of FIG. 1;

FIG. 3A is an enlarged portion of FIG. 1;

FIG. 3B is similar to FIG. 3A showing another embodiment;

FIG. 3C is a further enlarged portion of FIG. 3A, schematically showing some motions and forces involved;

FIG. 4 is an isometric view of the rotor of FIG. 1;

FIG. 5 is a schematic illustration of two pumps of the present invention connected in series; and

FIG. 6 is another embodiment according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIGS. 1, 2 and 4, a helix pump, generally indicated at numeral 100, is provided according to one preferred embodiment of the present invention.

The helix pump 100 includes a cylindrical housing 102 having at one end a working conduit 104, a pump inlet 106, and pump outlet 110. The housing 102, or at least the working conduit 104 are made of non-metal material, for example, a plastic, ceramic or other electrically non-conductive material, so that eddy currents are not induced by the alternating magnetic field of the stator and rotor system. Preferably, in addition to being non-conductive, the inner wall of conduit 104 is smooth, and not laminated, to thereby provide sealing capability and low friction with the rotor, as will be described further below. Connection means, such as a plurality of annular grooves 108, are provided on pump inlet 106 for connection with an oil source such as an oil tank (not shown). The end of the working conduit 104 abuts a shoulder (not indicated) of a pump outlet 110 which preferably is positioned co-axially with the housing 102. The pump outlet 110 is also provided with connection means, such as a plurality of annular grooves 112 for connection to an oil circuit, including, for example, engine parts for lubrication, cooling, etc. Any suitable connection means, such as flanged connection, or force-fit connection, etc. may be used. Alternately, where the pump inlet and/or outlet is in direct contact with the working fluid

(e.g. if the pump is submerged in a working fluid reservoir, for example), the inlet and/or outlet may have a different suitable arrangement.

A rotor 114 (cylindrical in this embodiment) is positioned within the working conduit 104, and includes a preferably relatively thin retaining sleeve 116, preferably made of a non-magnetic metal material, such as Inconel 718 (registered trade mark of for Inco Limited), titanium or certain non-magnetic stainless steels. The rotor 114 further includes at least one, but preferably a plurality of, permanent magnet(s) 118 within the sleeve 116 in a manner so as to provide a permanent magnet rotor suitable for use in a permanent magnet electrical motor. The permanent magnets 118 are preferably retained within the sleeve 116 by a pair of non-magnetic end plates 120, 122 and an inner magnetic metal sleeve 124. A central passage 125 preferably axially extends through the rotor 114. The rotor 114 is adapted for rotation within the working conduit 104. The rotor 114 external diameter is sized such that a sufficiently close relationship (discussed below) is defined between the external surface 115 of the rotor 115 and the internal surface (not indicated) of the working conduit 104, which permits a layer of working fluid (in this case oil) in the clearance between the rotor and the conduit. As will be described further below, the clearance is preferably sized to provide a non-turbulent flow, and more preferably, to provide a substantially laminar flow in the pump. As will also be discussed further below, this is because the primary pumping effect of the invention is achieved through the application of a viscous shear force by thread 123 on the working fluid, which is reacted by the rotor 114 to move the working fluid tangentially and axially through the pump.

Referring to FIGS. 3A and 4, in this embodiment three threads 123 are provided, in this embodiment in the form of wires 126, each having a thread height 131, a thread width 133 a thread length (not indicated), and preferably a rounded outer surface or land 127, for reasons explained further below, such as that which is provided by the use of circular cross-sectioned wires 126. A thread surface area (not indicated), being the thread length times the thread width 133, represents the portion of the thread which is exposed directly to conduit 104, the significance of which will be discussed further below. The wires 126 may be made of any suitable material, such as metal or carbon fibre, nylon, etc. The wires 126 are preferably mounted about the external surface of the rotor 114 in a helix pattern, having a helix or thread angle 135, and circumferentially spaced apart from each other 120°. When rotated, the rotor 114 is dynamically radially supported within conduit 104 substantially only by a layer of the oil (the working fluid, in this example) between the rounded outer surface 127 of the thread 123 and the inner surface of the working conduit 104, as described further below. Rounded surface 127 preferably has a radius of about 0.008" or greater, but depends on pump size, speed, working liquid, etc. The threads 123, the outer surface of rotor 114 and the inner surface of working conduit 104 together define a plurality of oil passages which are preferably relatively shallow and wide. These shallow and wide oil passages provide for a thin layer of working fluid between rotor and conduit.

In accordance with the present invention, the number and configuration of the helical thread(s) 123 is/are not limited to the wires 126 described above, but rather any other suitable type and configuration of helical thread(s) may be used. For example, referring to FIG. 3B, a more fastener-like thread 123 may be provide in the form of ridge 129, having a rounded surface 127, on the operative surface of the rotor. Alternately,

a thread **123** may be formed and then mounted to the rotor in a suitable manner. Any other suitable configuration may also be used.

Where the helical thread(s) are not integral with the rotor, they are preferably sealed to the rotor **114** to reduce leakage therebetween. For example, for wires **126** sealing is provided by welding or brazing, however other embodiments may employ an interference fit, other mechanical joints (e.g. adhesive or interlocking fit), friction fit, or other means to provide fixing and sealing. It will be understood that the mounting means and sealing means may vary, depend on the materials and configurations involved. Where extensible thread(s) are employed, such as wires **126**, it is preferable to pre-tension it/them to also help secure position and reduce unwanted movement.

Axial translation of the cylindrical rotor **114** within conduit **104** is limited by an inlet core member **128** and the outlet core member **130**, but rotor **114** is otherwise preferably axially displaceable therebetween (i.e. rotor **114** is axially shorter than the space available), as will be described further below. The non-rotating inlet core member **128** preferably has a conical shape for dividing and directing an oil inflow from the pump inlet **106** towards the space between the rotor **114** and the working conduit **104**, and is preferably generally co-axially positioned within the housing **102** and mounted adjacent thereto by a plurality (preferably three) of generally radial struts **132** (only one of which is shown in FIG. 2). The struts **132** are circumferentially spaced apart to allow the oil to flow therepast and may also act as inlet guide vanes. The inlet core member **128** includes end plate **134** mounted adjacent the inner side thereof, forming an inlet end wall for contacting the end plate **120** of the rotor **114**. The end plate **120** of the rotor **114** preferably has a central recess **136** to reduce the contacting area with the end plate **134**, but perhaps more importantly, in use the recess **136** is allowed to fill with pressurized oil via the central passage **125**, which helps balance the forces acting on rotor **114** and thereby reduce the axial load on the rotor **114** during the pump operation. End plate **134** and rotor **114** are configured to allow sufficient leakage therebetween, such that pressurized oil from central passage **125** may support rotor **114** in use in a manner similar to a thrust bearing. The struts **132** supporting the inlet core member **128** can also have a plurality of fluid supply passages **190** provided such that small jets of fluid may be directed from the pressurized liquid in central passage **125** (which has entered passage **125** through holes **142**, described further below) toward the inlet end of the pump through the supporting struts **132**, to promote an inlet fluid flow to the inlet of the pump, thereby improving the inlet conditions. Passages **125** and **190** thus provide a pressure feedback system.

Similar to the inlet core member **128**, the non-rotating outlet core member **130** preferably has a conical shape for directing and rejoining the flow of oil from the space between the rotor **114** and the working conduit **104** into the pump outlet **110**, and is preferably positioned generally co-axially with the housing **102** and the outlet **110**. The outlet core member **130** is mounted adjacent the outlet **110** by a plurality (preferably three) of struts **138** (only one is shown in FIG. 2) which are circumferentially spaced apart to permit pumped oil to flow therepast. The outlet core member **130** also has a central recess **140** and a plurality of openings **142** (see FIG. 2) to provide fluid communication between the central recess **140** and the working conduit **104**, for bypass purposes to be explained further below. The outlet core member **130** may also have a central hole **180** to provide an escape route or bleed for air or other gases that may otherwise be collected by centrifugal separation in the pumped fluid. In an alternate

configuration (not shown) a conduit may also or instead be provided to evacuate the separated gas/air which collects at this location, and/or in other locations where separated gas/air may collect depending on pump configuration.

In this embodiment, when the rotor **114** moves axially from adjacent the inlet core member **128** (i.e. as shown in FIGS. 1 and 2) towards the outlet core member **130**, a gap opens between the rotor **114** and the inlet core member **128** (see FIG. 5). The central passage **125** of the rotor **114**, the gap between the rotor **114** and the inlet core member **128** and the openings **142** in the outlet core member **130**, therefore form a bypass assembly which will be discussed further below.

Referring again to FIGS. 1 and 2, casing **144** is provided around the housing **102** and the pump outlet **110**, thereby forming a chamber **146** to accommodate a stator **148** therein. The casing **144** preferably includes an end wall **150** having a central opening (not indicated) for receiving the pump inlet **106**. A mounting flange **152** is provided on the end wall **150**. The casing **144** also has an open end closed by an end plate **154**, which has a central opening for receiving the pump outlet **110**, and is secured to the casing **144** by a retaining ring **156**. The end plate **154** further includes inner and outer insert portions **158**, **160** in cooperation with inner and outer retaining rings **162**, **164** to restrain the axial position of the stator **148** in the annular coolant inlet openings **170** and flow through cooling passages **149** in the stator to cool the electrical winding, and then exit from the coolant outlet openings **168**. As mentioned, preferably inlet openings **170** (adjacent the pump outlet end) are smaller than outlet openings **168** to “meter” oil into the cooling passages at the high pressure end of the pump while allowing relatively un-restricted re-entrance of the oil to the working conduit **104** via the larger holes of outlet openings **168**.

The present invention permits operation at large speed range, including very high speeds (e.g. ++10,000 rpm), providing that Reynolds number is maintained below about 10,000 between rotor and conduit, and more preferably 5000 and still more preferably below about 2500, as mentioned above. High speeds can permit the device to be made considerably smaller than prior art pumps having similar flow rates and pressures. The construction also permits better reliability (simple design, no bearings) and lower operating costs than the prior art.

Pump **100** of the present invention includes parts which are relatively easy to manufacture. Where wires **126** are used as threads, they can be mounted to the cylindrical rotor **114** by winding them thereonto in a helix pattern, preferably in a pre-tensioned condition, and the rotor **114** is then inserted into the working conduit **104** to thereby provide a pumping chamber between the rotor and the housing, and the end caps are put into place. This method of providing helical threads can be broadly applied to other types of pumps, not only to electrically driven pumps.

In one aspect, the present invention also permits the problems associated with large pressure drops caused by an inoperative pump in a multiple pump system to be simply addressed, as will now be described.

FIG. 5 schematically illustrates two helix pumps **100a** and **100b** according to the present invention in series. When pump **100a** is inoperative, the pressure differential across the inoperative pump **100a** is reversed relative to operative pump **100b** (i.e. the oil pressure at the inlet **110a** is greater than at the outlet **106a**). The rotor **114a** is thus forced towards the outlet core member **130a** and leaves a gap between the rotor **114a** and the inlet core member **128a**. Although the rotor **114a** axially abuts the outlet core member **130a**, the openings **142** (see FIG. 2) in the outlet core member **130a** provide a passage

7

from the central passage **125a** to the pump outlet **106a**. Therefore, in this case, oil pumped by the operative pump **100b** enters the pump inlet **110a** of the pump **100a** and a major portion of the oil is permitted to flow through the bypass passage formed by the central passage **125a** through the inoperative pump **100a**, thereby significantly reducing the pressure drop that would otherwise occur across the inoperative pump **100a**.

In another application of the present invention, the helix pump of the present invention can be used, for example, as a boost pump located upstream of a fuel pump in a fuel supply line, for example as may be useful in melting ice particles which may form in the fuel in low temperatures. The viscous shear force generated by the pump of the present invention to move the working liquid, also results in heat energy which can be used to melt any ice particles in the fuel flow.

It should be noted that modification of the described embodiments is possible without departing from the present teachings. For example, the invention may be used wherein the thread(s) is/are statically mounted to the stator, and a simple cylindrical rotor rotates therein, as depicted in FIG. 6, where elements analogous to those described above have similar reference numerals but are incremented by 200. Any other suitable combination or subcombination may be used. Also, the working medium may be any suitable liquid, such as fuel, water, etc. It should also be noted that the present concept may be applied to mechanically, hydraulically and pneumatically driven pumps, etc. The inoperative pump bypass feature is likewise applicable to other types of pumps, such as screw pumps, centrifugal pumps, etc. The bypass feature may be provided in a variety of configurations, and need not conform to the exemplary one described. Also, the pumped-medium stator cooling technique is applicable to other electrically driven pumps and fluid devices. Any suitable rotor and stator configuration may be used, and a permanent magnet and/or AC design is not required. The invention may be adapted to have an inside stator and outside rotor. Rounded surface **127** may have any radius or combination of multiple or compound radii, and may include flat or unrounded portions. The pressure feedback apparatus and bypass apparatus need not be provided by the same means, nor need they be provided in the rotor, not centrally in the rotor. The pump

8

chamber(s) may have any suitable configuration: the inlets and outlets need not be axially aligned or concentrically aligned; the pumping chamber need not be a constant radius or annular; axial pumping may be replaced with centrifugal or other radial configuration; the threads may not be continuous along the length of the rotor, but rather may be discontinuous with interlaced vanes; the threads may not be continuously helical; and still further modification will be apparent to the skilled reader and those listed here are not intended to be exhaustive. The scope of the present invention, rather, is intended to be limited solely by the scope of the claims.

The invention claimed is:

1. A pump for moving a liquid, the pump comprising an electric motor having a stator and magnetic rotor, the stator including at least one electric winding adapted, in use, to generate a rotating electromagnetic field, the rotor mounted adjacent the stator for rotation about an axis in response to the rotating electromagnetic field, the rotor and stator providing first and second spaced-apart surfaces defining a pumping passage therebetween, the pumping passage having an inlet at one axial end of the rotor and an outlet at another axial end of the rotor; and at least one helical thread disposed between the first and second surfaces and mounted to one of said surfaces, the thread when viewed in a cross section taken substantially parallel to the rotor axis having a rounded surface facing the other of said surfaces, wherein the rotor is sized relative to a selected working liquid such that, in use, the rotor in rotation is radially supported relative to the stator substantially only by a layer of the liquid maintained between the rotor and stator by rotor rotation.

2. The pump as defined in claim 1 wherein the rotor is a permanent magnet rotor.

3. The pump as defined in claim 1 wherein the at least one helical thread is mounted to the surface of the rotor.

4. The pump as defined in claim 1 wherein the at least one helical thread comprises three helical threads.

5. The pump as defined in claim 4 wherein the three helical threads are circumferentially spaced apart 120° from each other.

6. The pump as defined in claim 1 wherein the rounded surface has a radius of at least 0.008".

* * * * *